


# Single-LED

10-2601.3172K

Distribution by  
DigiKey

**DigiKey**

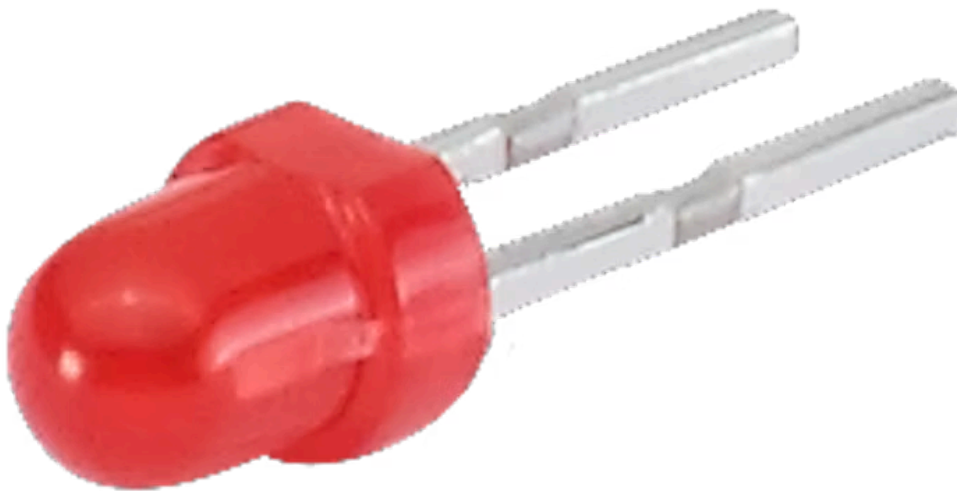

<https://digikey.eao.com/component/10-2601.317...>

Your product:

---



## 10-2601.3172K Single-LED

*Loading ...*

### OPERATING-/INDICATION PART

**Illumination colour:** Red

### ELECTRICAL CHARACTERISTICS

**Forward voltage:** 2.0 V DC @ 20 mA

**Operating voltage:** 2 V DC

**Operation current:** 20 mA

**Lumi. Intensity:** 450 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0.001 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER

**Short Description:** Single-LED, T1 Bi-Pin, Red, 2 V DC

**Kind of illumination:** Single-LED

**Hints:** For LED element fitting information see Application guidelines, LED polarity Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

**Pins:** Max. length: 8 mm

**Wiring diagrams:**

X+



y-