

Bi-colour LED

Distribution by DigiKey



10-2H12.314C







10-2H12.314C Bi-colour LED

OPER	ATIN	G-/IND	ICAT	ION	PART
-------------	------	--------	------	-----	------

Illumination colour: Green / Yellow

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V DC +10%

Operation current: 15 mA \pm 15 %

Lumi. Intensity: 900/550 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.002 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Bi-colour LED, BA9s, Green / Yellow, 24 V DC +10%

Kind of illlumination: Bi-colour-LED


Product attributes: X2: + = Yellow / X1: + = Green

Hints: The max. overall length of the lamp may not exeed


25mm,Electrical and optical data are measured at 25 °C,The specified 6 V DC, 24 V DC Bi-colour; 130 V AC, 130 V DC and 230 V AC versions are built with a protection diode,Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination.

The customer has to decide what resistor shall be used to the LED

Wiring diagrams:

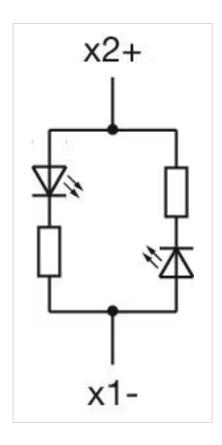

Dimension drawings:



A = (standard) B = (super bright)