

Single-LED

Distribution by DigiKey



10-2H13.3164Q







10-2H13.3164Q Single-LED

OPERATING-/INDICATION PART	OPER/	ATING-	/INDIC/	ATION	I PART
----------------------------	-------	--------	---------	-------	--------

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 - 30 V DC +10%

Operation current: 13 - 19 mA \pm 15 %

Lumi. Intensity: 270 - 380 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.002 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Single-LED, BA9s, Yellow, 24 - 30 V DC +10%

Kind of illlumination: Single-LED


Hints: Luminosity and wave length variations caused by LED manufacturing processes

may cause slight differences regarding the illumination. The customer has to


decide what resistor shall be used to the LED Electrical and optical data are measured at 25 °C

The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier

Wiring diagrams:

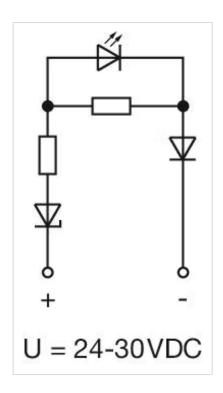

Dimension drawings:



A = (standard) B = (super bright)