

Your Expert Partner for Human Machine Interfaces

Distribution by DigiKey DigiKey



10-2H13.3164Q






https://digikey.eao.com/p/10-2H13.3164Q

Your product:




10-2H13.3164Q Single-LED

ODEDATING (INDICATION DADT	
OPERATING-/INDICATION PART	
Illumination colour:	Yellow
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 - 30 V DC +10%
Operation current:	13 - 19 mA ±15 %
Lumi. Intensity:	270 - 380 mcd
MECHANICAL CHARACTERISTICS	
Weight:	0.002 kg
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Single-LED, BA9s, Yellow, 24 - 30 V DC +10%
Kind of illlumination:	Single-LED
Hints:	Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED Electrical and optical data are measured at 25 °C The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier
Wiring diagrams:	

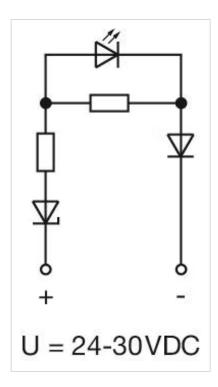

Dimension drawings:



A = (standard) B = (super bright)