

Single-LED

Distribution by DigiKey



10-2H13.3165Q







10-2H13.3165Q Single-LED

OPEF	RATIN	G-/INI	DICAT	ION F	PART

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 - 30 V DC +10%

Operation current: 12 - 18 mA \pm 15 %

Lumi. Intensity: 1800 - 2700 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.002 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Single-LED, BA9s, Green, 24 - 30 V DC +10%

Kind of illlumination: Single-LED


Hints: Luminosity and wave length variations caused by LED manufacturing processes

may cause slight differences regarding the illumination. The customer has to


decide what resistor shall be used to the LED Electrical and optical data are measured at 25 $^{\circ}\mathrm{C}$

The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier

Wiring diagrams:

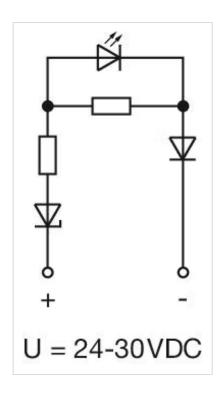

Dimension drawings:



A = (standard) B = (super bright)