

Actuator

14-041.006 Distribution by DigiKey







Your product:



14-041.006 Actuator

E	D	0	N	п
г	п	v	14	

Front form: Round

MOUNTING

Design: Flush

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

MECHANICAL CHARACTERISTICS

Terminal: Universal terminal, 2 x 0.5 mm

Tightening torque: Fixing nut max. 0.25 Nm

Weight: 0.015 kg

AMBIENT CONDITION

IP front protection: IP67, according to DIN EN 60529

Operating temperature: - 25 °C, mounted as a block, make sure the heat can escape freely

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

Approbations: CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL

CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

REACH: REACH compliant


RoHS: RoHS compliant

OTHER


Short Description:

Actuator, Round, Universal terminal, 2 x 0.5 mm, IP67, according to DIN EN 60529

Wiring diagrams:

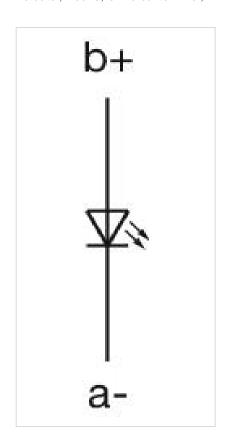

Component layouts:




A = Terminals (rear side)


B = Anti twist device

C = Diode block


D = Drilling plan (component side)

Mounting cut-outs:



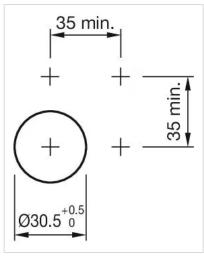


Dimension drawings:



A = Solder terminal

B = Plug-in terminal 2.8 x 0.5 mm C = Universal terminal 2.0 mm x 0.5 mm



A = Solder terminal B = Plug-in terminal 2.8 x 0.5 mm C = Universal terminal 2.0 mm x 0.5 mm