

Indicator

17-2A0355

Distribution by DigiKey









17-2A0355 Indicator

Front form:

Front dimension: Ø 16 mm

Reflector: Metal, polished chromium-plated

Round

MOUNTING

Design: Raised

Mounting cut-out: Ø 14 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens: round

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

Operation current: 9 - 17 mA \pm 15 %

Lumi. Intensity: 1250 mcd

Polarity: Anode (+) Brass plug-in connector


Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTICS


Terminal: Plug-in terminal, 2.8 x 0.8 mm

Tightening torque: Fixing nut max. 0.2 Nm


Weight:	0.014 kg	
AMBIENT CONDITION		
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529	
Operating temperature:	– 20 °C + 60 °C	
Storage temperature:	– 25 °C + 80 °C	
CERTIFICATE		
Approbations:	UL	
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)	
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Indicator, Ø 14 mm, Ø 16 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Green	
Kind of illlumination:	Single-LED	
Product attributes:	Sunlight visibility	
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-) IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket. The plastic is limited resistant to chemicals.	
Wiring diagrams:		

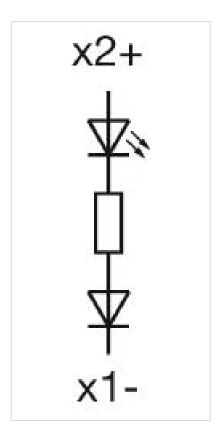

Mounting cut-outs:

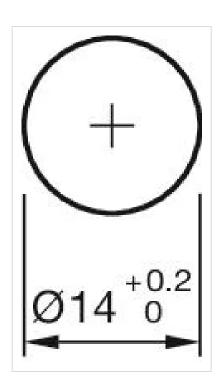

Dimension drawings:



A = Protection tube (only 230 VAC) B = Tri-colour