

# Indicator

17-500430

Distribution by DigiKey

Your Expert Partner for Human Machine Interfaces









## 17-500430 Indicator

Loading . . .

FRONT	
Front dimension:	Ø 9 5 mm

Front form: Round

**Reflector:** Metal, polished chromium-plated, internal

#### **MOUNTING**

Design: Raised

Mounting cut-out: Ø 8 mm

Mounting type: Panel mounting

#### **OPERATING-/INDICATION PART**

Lens: round

Illumination colour: Red

#### **ELECTRICAL CHARACTERISTICS**

Operating voltage: 230 V AC  $\pm 10 \%$ 

**Operation current:** 3 mA  $\pm 15$  %

Lumi. Intensity: 22 mcd

Polarity: Anode (+) Brass plug-in connector


Cathode (-) Brass tinned plug-in connector

#### **MECHANICAL CHARACTERISTICS**


**Terminal:** Plug-in terminal, 2.8 x 0.8 mm

**Tightening torque:** Fixing nut max. 0.2 Nm


Weight:	0.005 kg
AMBIENT CONDITION	
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Operating temperature:	– 20 °C + 60 °C
Storage temperature:	– 25 °C + 80 °C
CERTIFICATE	
Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Indicator, Ø 8 mm, Ø 9,5 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Red
Kind of illlumination:	Single-LED
Product attributes:	With terminals protection tube
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-) IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket. The plastic is limited resistant to chemicals.
Wiring diagrams:	

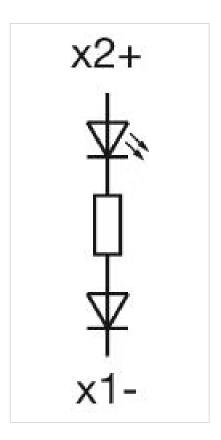

### Mounting cut-outs:

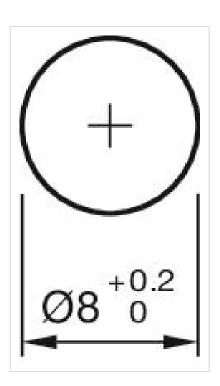

Dimension drawings:

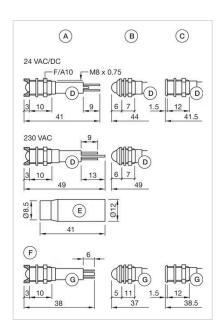

A = interior

B = exterior

C = superflat D = Plug-in terminal 2.8 mm x 0.8 mm

E = Multi-colour F = Protection tube

G = Plug-in terminal 2.0 mm x 0.5 mm