

Actuator

17-530352

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-530352>

Your product:



17-530352 Actuator

FRONT

Reflector:	Metal, polished chromium-plated
Front dimension:	Ø 25 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
-----------------------------	--------

ELECTRICAL CHARACTERISTICS

Operation current:	19 mA ±15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	350 mcd
Operating voltage:	24 V DC ±10 %

MECHANICAL CHARACTERISTIC

Weight:	0.042 kg
Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm

AMBIENT CONDITION

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

Storage temperature: - 25 °C ... + 80 °C

Operating temperature: - 20 °C ... + 60 °C

CERTIFICATE

Approbations: UL

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 25 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Yellow


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Kind of illumination: Single-LED


Mounting cut-outs:

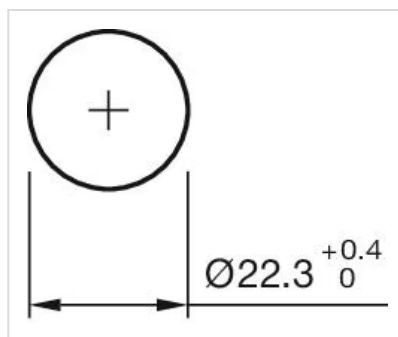

Wiring diagrams:

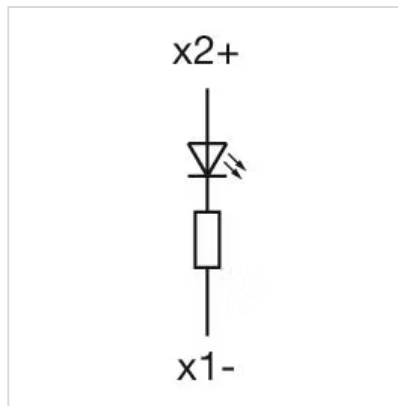


Dimension drawings:

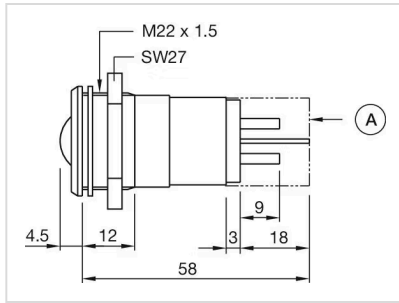

A = Protection tube

Component layouts:

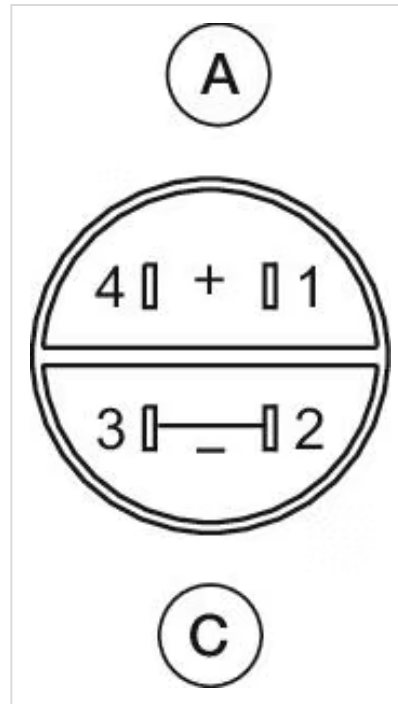

A = Anode
B = Cathode