

Indicator

17-570231

Distribution by DigiKey









17-570231 Indicator

Front dimension: Ø 25 mm

Reflector: Metal, polished chromium-plated

Round

MOUNTING

Front form:

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens: round

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 230 V AC $\pm 10\%$

Operation current: 4 mA ± 15 %

Lumi. Intensity: 20 mcd

Polarity: Anode (+) Brass plug-in connector

Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTICS


Terminal: Plug-in terminal, 2.8 x 0.8 mm

Tightening torque: Fixing nut max. 0.2 Nm


AMBIENT CONDITION		
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529	
Operating temperature:	– 20 °C + 60 °C	
Storage temperature:	– 25 °C + 80 °C	
CERTIFICATE		
Approbations:	UL	
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)	
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Indicator, Ø 22.3 mm, Ø 25 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Green	
Kind of illlumination:	Single-LED	
Product attributes:	With terminals protection tube	
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-) IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket. The plastic is limited resistant to chemicals.	
Wiring diagrams:		

0.044 kg

Weight:

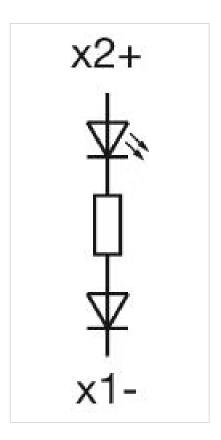


Component layouts:

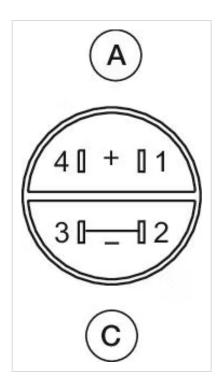


A = Anode B = Cathode

Mounting cut-outs:



Dimension drawings:



A = Protection tube