

Your Expert Partner for Human Machine Interfaces

Actuator

18-060.0054L









https://digikey.eao.com/p/18-060.0054L

Your product:



18-060.0054L Actuator

PRODUCT RANGE

Phase-out
Ø 19 mm
Round
Black
Plastic

MOUNTING

Design:	Flush
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Yellow
Lens material:	Plastic
Lens illumination:	Illuminated
Lens shape:	Flush
Lens optics:	translucent
Illumination colour:	White

ELECTRICAL CHARACTERISTICS


Operating voltage:

MECHANICAL CHARACTERISTICS

Terminal:

Weight:	0.002 kg
AMBIENT CONDITION	
Operating temperature:	– 25 °C + 65 °C
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
	Actuator (1.10 mm, Fluck, Illuminated Vallau, Plastic translupant, Pound, Plast
Short Description:	Actuator, Ø 19 mm, Flush, Illuminated, Yellow, Plastic, translucent, Round, Black, Plastic, Soldering terminal, White
Dimension:	Ø 13.8 mm
Product attributes:	Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
Wiring diagrams:	
	T .


Soldering terminal

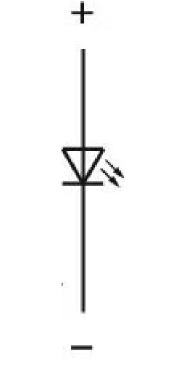

Component layouts:

(A) (B) 9 x 9 mm 19 x 19 mm 9 x 14 mm 09 mm 019 x 19 mm 019 x 19 mm (19 x 19 mm 019 x 19 mm (19 x 19 mm) (19 x 19 mm A = Terminals (rear side) B = Indicator

Mounting cut-outs:



Dimension drawings:

