

# Actuator

19-  
139.015

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/19-139.015>

Your product:

---



## 19-139.015 Actuator

### FRONT

|                       |         |
|-----------------------|---------|
| Front dimension:      | Ø 9 mm  |
| Front form:           | Round   |
| Front bezel colour:   | Black   |
| Front bezel material: | Plastic |

### MOUNTING

|                   |                |
|-------------------|----------------|
| Design:           | Raised         |
| Mounting cut-out: | Ø 8 mm         |
| Mounting type:    | Panel mounting |

### OPERATING-/INDICATION PART

|                    |             |
|--------------------|-------------|
| Lens illumination: | Illuminated |
|--------------------|-------------|

### ELECTRICAL CHARACTERISTICS

|  |   |
|--|---|
| Switching voltage and switching current: | Silver plated<br>50 VAC, 0.8 A/72 VDC, 0.7 A<br>Gold plated<br>50 VAC, 100 mA/72 VDC, 70 mA |
| Contacts:                                | 1 NO  |
| Switching rating:                        | 50 V @ 0,8 A  |
| Electric strength:                       | 2500 VAC, 50 Hz, 1 minute, as per IEC 60512-2-11 between all terminals and earth            |

### MECHANICAL CHARACTERISTICS

|                             |   |
|-----------------------------|---|
| <b>Terminal:</b>            | Plug-in terminal, 2 x 0.5 mm  |
| <b>Contact material:</b>    | Silver  |
| <b>Switching action:</b>    | Momentary   |
| <b>Switching system:</b>    | Snap-action switching element   |
| <b>Switching system:</b>    | Single-break, snap-action switching system with 1 normally open contact                                   |
| <b>Mechanical lifetime:</b> | 2 Mil. cycles of operation  |
| <b>Operating force:</b>     | 1.6 N   |
| <b>Operating Travel:</b>    | ca. 2.8 mm ± 0.2 mm   |
| <b>Tightening torque:</b>   | Fixing nut max. 0.2 Nm  |
| <b>Wire cross section:</b>  | Max. wire diameter 2 wires à 0.8 mm<br>Max. wire cross-section of stranded cable 1 x 0.75 mm <sup>2</sup> |
| <b>Weight:</b>              | 0.002 kg  |

## AMBIENT CONDITION


|                               |  |
|-------------------------------|--|
| <b>IP Protection:</b>         | IP40 front side, according to DIN EN 60529   |
| <b>Operating temperature:</b> | – 25 °C ... + 45 °C with filament lamp, – 25 °C ... + 65 °C with LED, – 25 °C ... + 65 °C without illumination, mounted as a block, make sure the heat can escape freely |
| <b>Storage temperature:</b>   | – 40 °C ... + 85 °C  |

## CERTIFICATE


|                      |                       |
|----------------------|-----------------------|
| <b>Conformities:</b> | 2011 / 65 / EC (RoHS) |
| <b>REACH:</b>        | REACH compliant       |
| <b>RoHS:</b>         | RoHS compliant        |

## OTHER

|                           |   |
|---------------------------|---|
| <b>Short Description:</b> | Actuator, Ø 8 mm, Ø 9 mm, Illuminated, Round, Black, Plastic, 1 NO, Momentary, Plug-in terminal, 2 x 0.5 mm |
| <b>Internal size:</b>     | Ø 7,3 mm  |
| <b>Housing colour:</b>    | Black   |
| <b>Housing material:</b>  | Plastic   |
| <b>Wiring diagrams:</b>   |   |

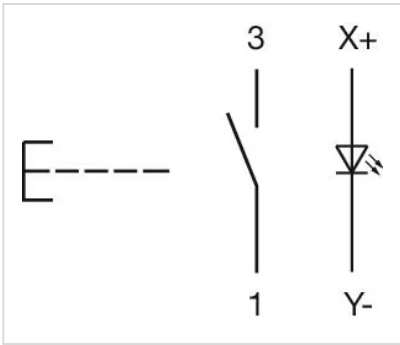


**Component layouts:**

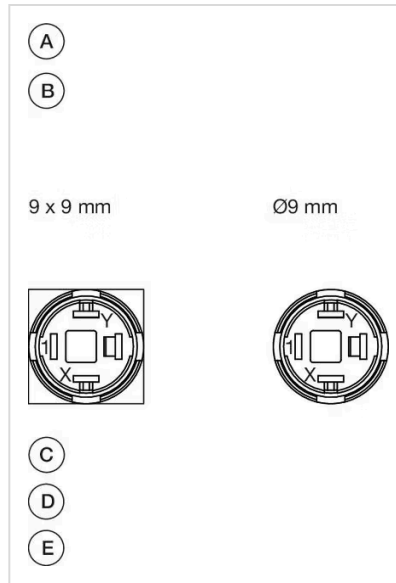

A = Terminals (rear side)  
 B = Illuminated pushbutton  
 C = x = Contact No.  
 D = 2 = Normally open  
 E = 4 = Normally close

**Mounting cut-outs:**

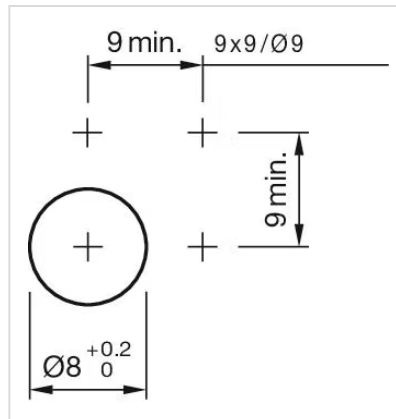

**Dimension drawings:**

