

Actuator

45-
2234.21E0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/45-2234.21E0.000>

Your product:



45-2234.21E0.000

Actuator

FRONT

| | |
|-----------------------|-----------|
| Front dimension: | Ø 29,5 mm |
| Front form: | Round |
| Front bezel colour: | Silver |
| Front bezel material: | Metal |

MOUNTING

| | |
|-------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|----------------------|------------------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Flush |
| Lens optics: | transparent |
| Lens type: | Level with front bezel |
| Illumination colour: | Red |

MECHANICAL CHARACTERISTICS

| | |
|-------------------|-----------------------------|
| Switching action: | Maintained |
| Switching system: | Slow-make switching element |

| | |
|-----------------------------|-----------------------------|
| Mechanical lifetime: | 500 000 cycles of operation |
| Operating frequency: | Max. 1 800/h |
| Weight: | 0.038 kg |

AMBIENT CONDITION


| | |
|-------------------------------|--|
| IP front protection: | IP66, IP67, IP69K |
| Operating temperature: | – 25 °C ... + 70 °C |
| Storage temperature: | – 40 °C ... + 80 °C |
| Shock resistance: | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance: | According to IEC 60068-2-6: 20 ... 500 Hz: 5 g |
| Climate resistance: | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6 |

CERTIFICATE


| | |
|---------------|-----------------|
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |

OTHER

| | |
|----------------------------|---|
| Short Description: | Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Illuminated, Red, Plastic, transparent, Round, Silver, Metal, Maintained, IP66, IP67, IP69K, Red |
| Housing colour: | Silver |
| Housing material: | Metal |
| Product attributes: | Push to unlatch |
| Hints: | Push to unlatch |
| Wiring diagrams: | |

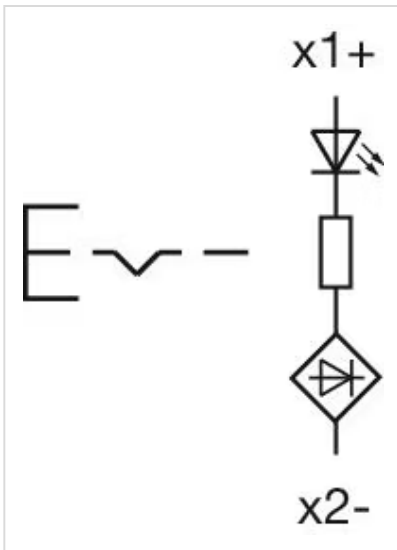

Mounting cut-outs:

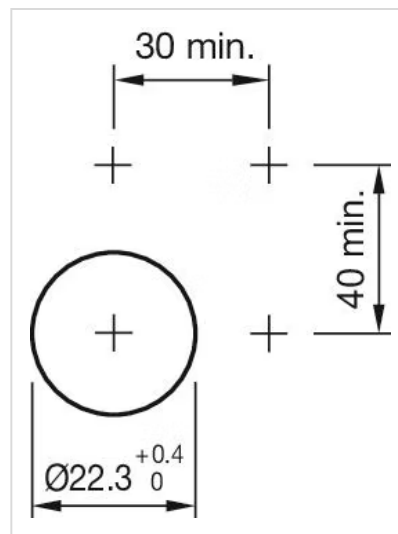

Dimension drawings:

