

Actuator

45-
2630.2AE0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/component/45-2630.2AE...>

Your product:



45-2630.2AE0.000 Actuator

Loading ...

FRONT

| | |
|------------------------------|---------|
| Front dimension: | Ø 60 mm |
| Front form: | Round |
| Front bezel colour: | Silver |
| Front bezel material: | Metal |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|---------------------------|---------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Mushroom-head |
| Lens optics: | transparent |

MECHANICAL CHARACTERISTICS

| | |
|-----------------------------|-----------------------------|
| Switching action: | Maintained |
| Switching system: | Slow-make switching element |
| Release type: | Pull unlock |
| Mechanical lifetime: | 500 000 cycles of operation |

Operating frequency: Max. 1 800/h

Weight: 0.067 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 60 mm, Mushroom-head, Illuminated, Red, Plastic, transparent, Round, Silver, Metal, Maintained, IP66, IP67, IP69K, Pull unlock

Housing colour: Silver

Housing material: Metal

Wiring diagrams:

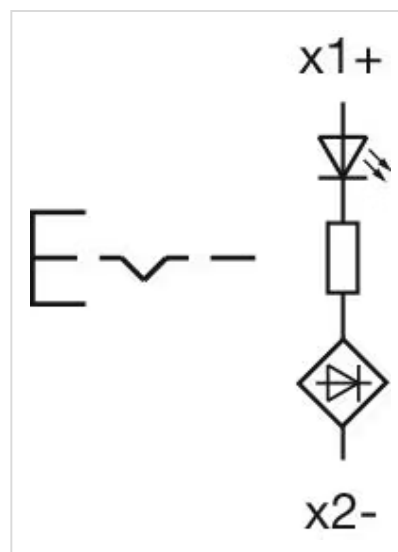

Mounting cut-outs:



Dimension drawings:

