

Actuator

45-
2729.1010.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/component/45-2729.101...>

Your product:



45-2729.1010.000 Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Black
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Raised
Lens optics:	opaque
Lever colour:	Black
Lever material:	plastic
Lever shape:	round

MECHANICAL CHARACTERISTICS

Switching action:	Maintained
--------------------------	------------

Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h
Weight:	0.018 kg

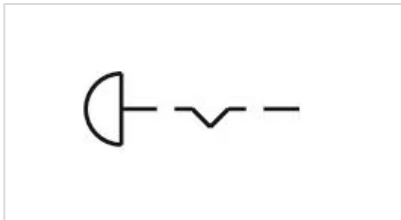
AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
Operating temperature:	- 25 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 22.3 mm, Ø 29 mm, Raised, Non illuminated, Black, Plastic, opaque, non illuminative, Black, round, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock
Dimension:	Ø 29 mm
Housing material:	Plastic
Product attributes:	Twist to release, can be latched after pressing by rotating to the right
Wiring diagrams:	

Mounting cut-outs:



Dimension drawings:

