

# Actuator

45-  
2729.1010.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/45-2729.101...>

Your product:

---



## 45-2729.1010.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 29 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Black
<b>Lens material:</b>	Plastic
<b>Lens illumination:</b>	Non illuminated
<b>Lens shape:</b>	Raised
<b>Lens optics:</b>	opaque
<b>Lever colour:</b>	Black
<b>Lever material:</b>	plastic
<b>Lever shape:</b>	round

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Maintained
--------------------------	------------

**Release type:** Twist to unlock

**Mechanical lifetime:** 300 000 cycles of operation

**Operating frequency:** Max. 600/h

**Weight:** 0.018 kg

#### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

#### OTHER


**Short Description:** Actuator, Ø 22.3 mm, Ø 29 mm, Raised, Non illuminated, Black, Plastic, opaque, non illuminative, Black, round, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock

**Dimension:** Ø 29 mm

**Housing material:** Plastic

**Product attributes:** Twist to release, can be latched after pressing by rotating to the right

**Wiring diagrams:**

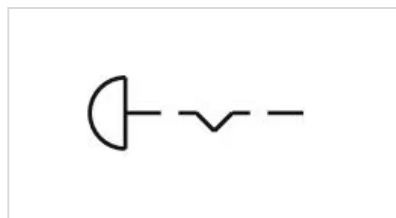

**Mounting cut-outs:**



**Dimension drawings:**

