

Actuator

Distribution by
DigiKey

DigiKey

45-

290K.2000.116



<https://digikey.eao.com/component/45-290K.200...>

Your product:



45-290K.2000.116 Actuator

FRONT

Front dimension: Ø 29,5 mm

Front form: Round

Front bezel colour: Silver

Front bezel material: Metal

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

MECHANICAL CHARACTERISTICS

Switching action: Rest (a) - Momentary

Switching positions: 2 positions

Switching angle: 45° right

Mechanical lifetime: 1 Mil. cycles of operation (RCC/RPB)

Operating frequency: 1 800/h

Weight: 0.076 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: - 25 °C ... + 70 °C

Storage temperature: - 40 °C ... + 80 °C


Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description:	Actuator, Ø 22.3 mm, Ø 29,5 mm, Round, Silver, Metal, Rest (a) - Momentary, IP66, IP67, IP69K
Housing material:	Metal
Hints:	The standard lock: RONIS, T254
Switching positions:	

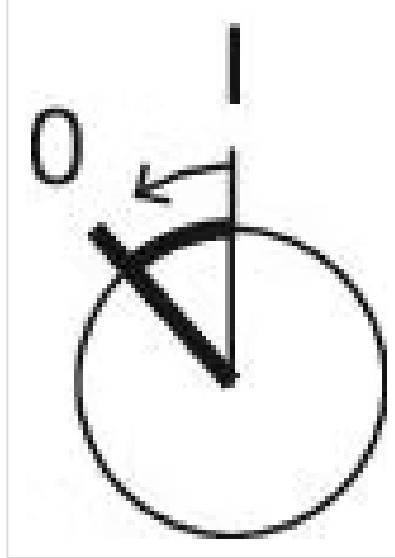

Wiring diagrams:



Mounting cut-outs:

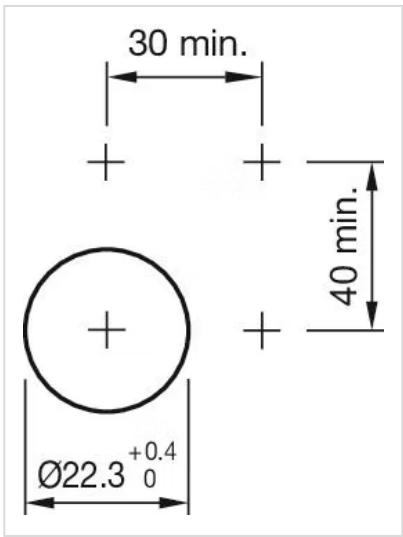

Dimension drawings:

