

# Actuator

45-  
2F38.2010.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/45-2F38.2010.000>

Your product:

---



## 45-2F38.2010.000 Actuator

### FRONT

Front dimension:	Ø 29,5 mm
Front form:	Round
Front bezel colour:	Silver
Front bezel material:	Metal

### MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

### OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic

### MECHANICAL CHARACTERISTICS

Switching action:	Momentary
Mechanical lifetime:	250 000 cycles of operation per direction of actuation
Weight:	0.085 kg

### AMBIENT CONDITION

IP front protection:	IP65, IP67
Operating temperature:	- 25 °C ... + 70 °C


<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2

## CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 29,5 mm, Black, Round, Silver, Metal, Momentary, IP65, IP67
<b>Housing material:</b>	Metal
<b>Product attributes:</b>	2 positions (U-D)
<b>Hints:</b>	Lockable only in center position
<b>Wiring diagrams:</b>	

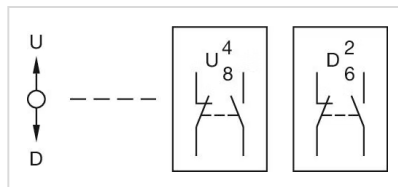

## Mounting cut-outs:

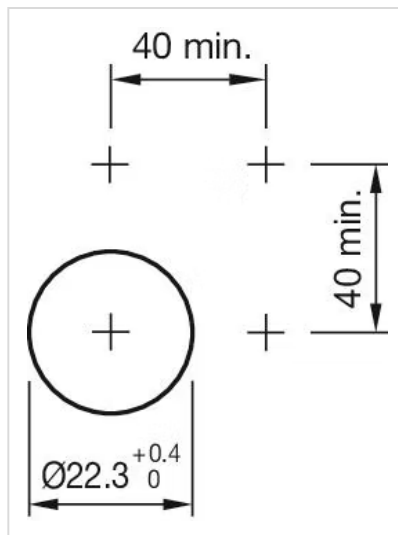

## Dimension drawings:

