


# Actuator

45-  
2J31.25T0.000

Distribution by  
DigiKey

**DigiKey**

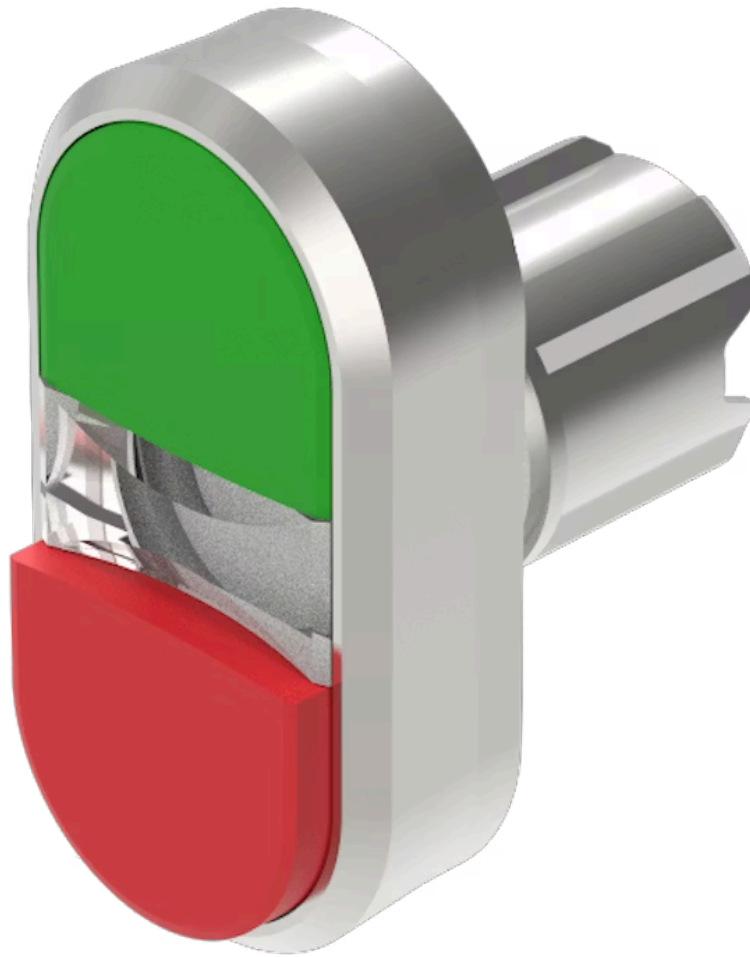

<https://digikey.eao.com/component/45-2J31.25T...>

Your product:

---



## 45-2J31.25T0.000 Actuator

*Loading . . .*

### FRONT

<b>Front dimension:</b>	58 mm x 35 mm
<b>Front form:</b>	Rectangular
<b>Front bezel colour:</b>	Silver
<b>Front bezel material:</b>	Metal

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Green-red
<b>Lens material:</b>	Plastic
<b>Lens illumination:</b>	Non illuminated
<b>Lens shape:</b>	Flush
<b>Lens optics:</b>	opaque
<b>Lens type:</b>	Raised above front bezel

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Momentary
<b>Switching system:</b>	Slow-make switching element
<b>Mechanical lifetime:</b>	2 Mil. cycles of operation

**Operating frequency:** Max. 3 600/h

**Weight:** 0.068 kg

### **AMBIENT CONDITION**

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2

### **CERTIFICATE**

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### **OTHER**

**Short Description:** Actuator, Ø 22.3 mm, 58 mm x 35 mm, Flush, Non illuminated, Green-red, Plastic, opaque, Rectangular, Silver, Metal, Momentary, IP66, IP67, IP69K


**Housing colour:** Silver

**Housing material:** Metal

**Wiring diagrams:**

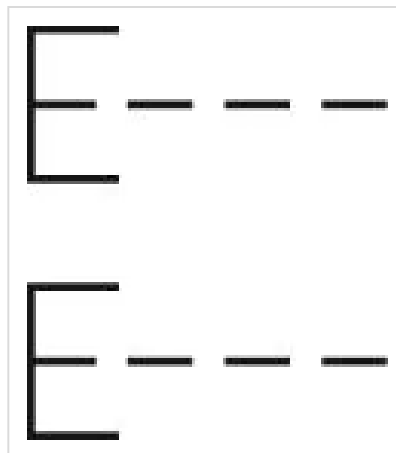


**Component layouts:**

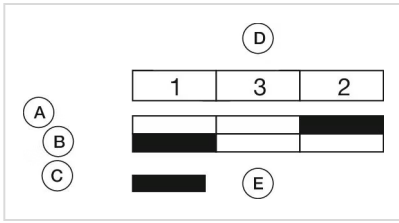

- A = Switching action
- B = green (white) button pressed
- C = red (black) button pressed
- D = Arrangement switching element corresponds to designation of front adaptor
- E = Switching element actuated

**Mounting cut-outs:**

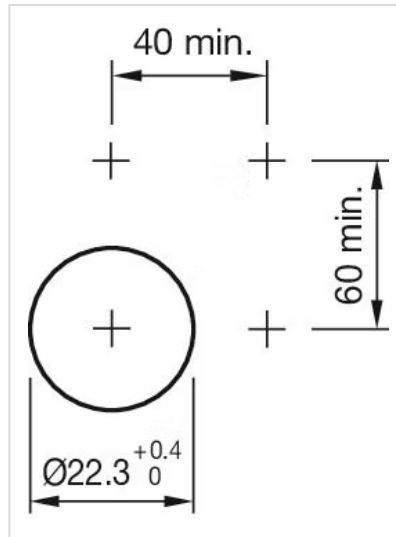

**Dimension drawings:**

