

# Actuator

45-  
2T00.10F0.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/45-2T00.10F...>

Your product:

---



## 45-2T00.10F0.000 Actuator

*Loading ...*

### FRONT

**Front dimension:** Ø 30 mm

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens cap colour:** Amber

**Lens cap material:** Plastic

**Lens cap shape:** flush

**Lens cap optical effect:** transparent

**Illumination colour:** Amber

### MECHANICAL CHARACTERISTICS

**Weight:** 0.033 kg

### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** - 25 °C ... + 70 °C

**Storage temperature:** - 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE

**REACH:** REACH compliant


**RoHS:** RoHS compliant

### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 30 mm, Round, IP66, IP67, IP69K, Amber

**Housing material:** Plastic

**Wiring diagrams:**

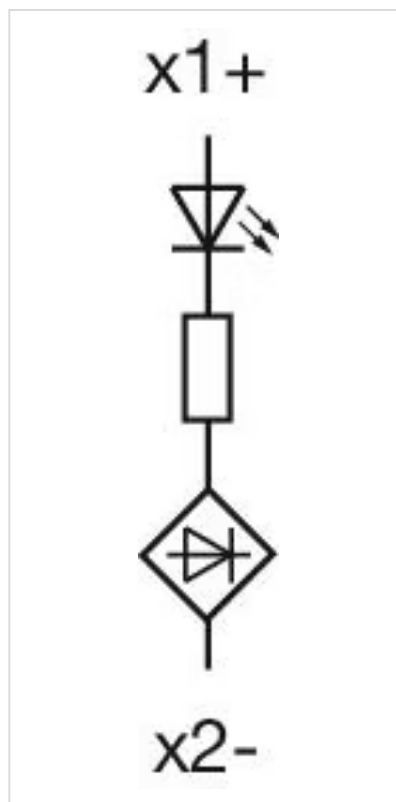

**Mounting cut-outs:**



Dimension drawings:

