

Actuator

45-2T07.10H0.000 Distribution by DigiKey









45-2T07.10H0.000 Actuator

_	_	_		-
-	к	u	N	

Front dimension: Ø 29,5 mm

Front form: Round

Front bezel colour: Black

Front bezel material: Plastic

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Green

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Lens type: Level with front bezel

Lens cap colour: Green

Illumination colour: Green

MECHANICAL CHARACTERISTICS

Weight: 0.018 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: $-25 \, ^{\circ}\text{C} \, ... + 70 \, ^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 80 \, ^{\circ}\text{C}$

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Green, Plastic, transparent, Round,


Black, Plastic, IP66, IP67, IP69K, Green

Housing material: Plastic

Wiring diagrams:

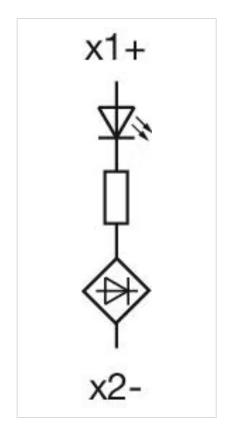

Mounting cut-outs:

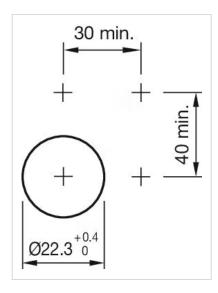

Dimension drawings:

