

# Actuator

45-  
2T07.4FK0.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/45-2T07.4FK...>

Your product:

---



## 45-2T07.4FK0.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 38 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Sand grey
<b>Front bezel material:</b>	Metal

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens cap colour:</b>	Colourless
<b>Lens cap material:</b>	Plastic
<b>Lens cap shape:</b>	flush
<b>Lens cap optical effect:</b>	transparent
<b>Illumination colour:</b>	White

### MECHANICAL CHARACTERISTICS

<b>Weight:</b>	0.071 kg
----------------	----------

### AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
-----------------------------	-------------------

**Operating temperature:** – 25 °C ... + 70 °C  
**Storage temperature:** – 40 °C ... + 80 °C  
**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms  
**Vibration resistance:** According to IEC 60068-2-6: 2 ... 500 Hz: 5 g  
**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 38 mm, Round, Sand grey, Metal, IP66, IP67, IP69K, White

**Housing material:** Metal

**Hints:** Front panel thickness 1 ... 6 mm

**Wiring diagrams:**

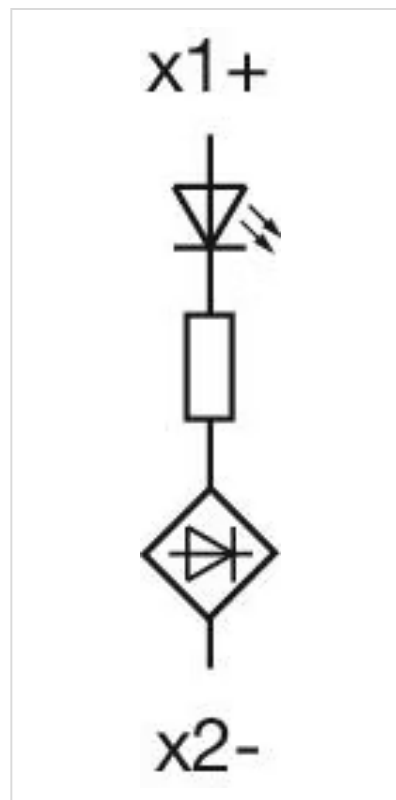

**Dimension drawings:**

