

Actuator

45-2T07.4FK0.000 Distribution by DigiKey









45-2T07.4FK0.000 Actuator

	_	_		-
ь.	к	()	N	

Front dimension: Ø 38 mm

Front form: Round

Front bezel colour: Sand grey

Front bezel material: Metal

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens cap colour: Colourless

Lens cap material: Plastic

Lens cap shape: flush

Lens cap optical effect: transparent

Illumination colour: White

MECHANICAL CHARACTERISTICS

Weight: 0.071 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: $-25 \, ^{\circ}\text{C} \, ... + 70 \, ^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 80 \, ^{\circ}\text{C}$

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Actuator, Ø 22.3 mm, Ø 38 mm, Round, Sand grey, Metal, IP66, IP67, IP69K,

White

Housing material: Metal

Hints: Front panel thickness 1 ... 6 mm

Wiring diagrams:

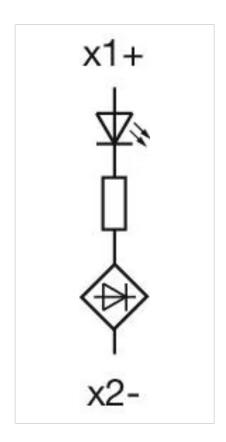

Dimension drawings:

