


Illumination element

Distribution by DigiKey



45-320.1E11

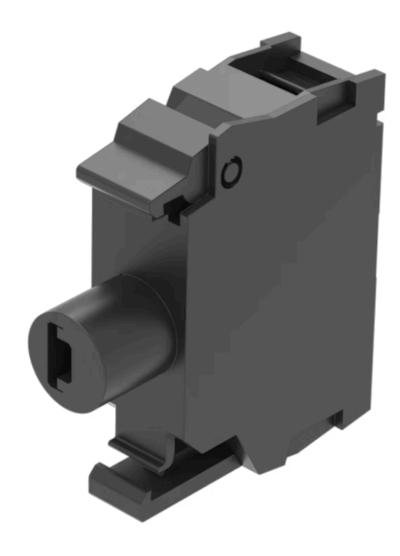





45-320.1E11 Illumination element

P	R	Ö	D	u	C.	ГΙ	R	Δ	N	G	F

Product Status: Phase-out

MOUNTING

Component mounting type: Front mounting

OPERATING-/INDICATION PART

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Operating voltage: 6 - 24 V AC/DC

Operation current: 6 mA

Surge voltage resistance: 4 kV

Lumi. Intensity: 450 - 1120 mcd

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm²)

- With end sleeves 2 x (0.5 \dots 0.75 mm²)

Terminal details 2: Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)
 Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.008 kg

CERTIFICATE


REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Illumination element, Screw terminal, Red, 6 - 24 V AC/DC, Front mounting

Wiring diagrams:

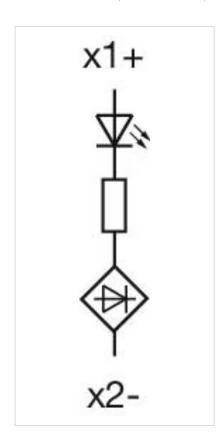

Dimension drawings:

