

# Illumination element

Distribution by DigiKey



45-320.1F16







# 45-320.1F16 Illumination element

M	O	u	M.	П	N	C

Component mounting type: Front mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: Amber

#### **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 450 - 1120 mcd

### **MECHANICAL CHARACTERISTICS**

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm<sup>2</sup>)

- With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

Terminal details 2: Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

**Weight:** 0.009 kg

#### CERTIFICATE

**REACH:** REACH compliant


RoHS: RoHS compliant

## **OTHER**

**Short Description:** 

Illumination element, Screw terminal, Amber, 24 V AC/DC, Front mounting

Wiring diagrams:

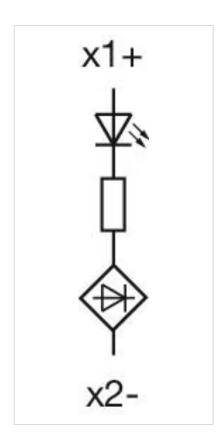

Dimension drawings:

