


Your Expert Partner for Human Machine Interfaces

Illumination element

45-320.1H16

Distribution by DigiKey DigiKey

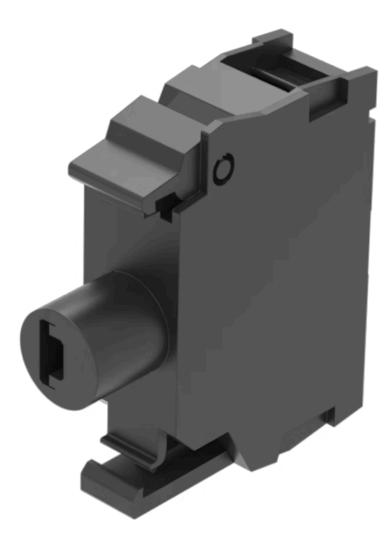



https://digikey.eao.com/p/45-320.1H16

Your product:



45-320.1H16 Illumination element

PRODUCT RANGE Product Status:	Phase-out
MOUNTING Component mounting type:	Front mounting
OPERATING-/INDICATION PART	
Illumination colour:	Green
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 V AC/DC
Surge voltage resistance:	4 kV
Lumi. Intensity:	900 - 1400 mcd
MECHANICAL CHARATERISTIC	
Terminal:	Screw terminal
Terminal details 1:	Solid 2 x (1.0 1.5mm²) - With end sleeves 2 x (0.5 0.75 mm²)
Terminal details 2:	Finely stranded - Without end sleeves 2 x (0.5 0.75 mm ²) - Without end sleeves 2 x (0.5 1.5 mm ²) - For AWG cables for auxiliary contacts 2 x (18 14)
Weight:	0.01 kg

CERTIFICATE

REACH:

RoHS:

REACH compliant


RoHS compliant

OTHER

Short Description:

Wiring diagrams:

Illumination element, Screw terminal, Green, 24 V AC/DC, Front mounting

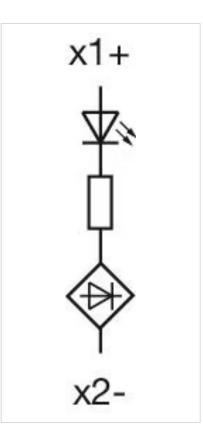

Dimension drawings:

