


Your Expert Partner for Human Machine Interfaces

# Illumination element

45-320.1H18

Distribution by DigiKey DigiKey

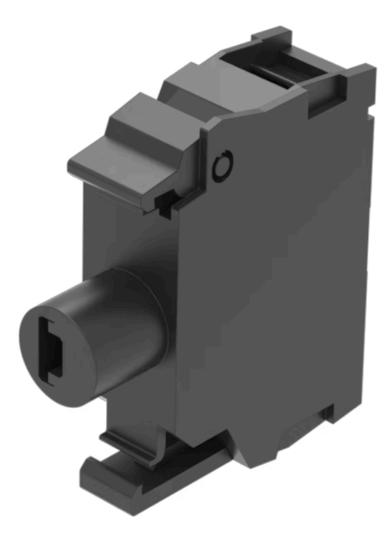



https://digikey.eao.com/p/45-320.1H18

### Your product:



## 45-320.1H18 Illumination element

MOUNTING	
Component mounting type:	Front mounting
<b>OPERATING-/INDICATION PART</b>	
Illumination colour:	Green
ELECTRICAL CHARACTERISTICS	
Operating voltage:	230 V AC
Surge voltage resistance:	4 kV
Lumi. Intensity:	900 - 1400 mcd

#### MECHANICAL CHARACTERISTICS

Screw terminal
Solid 2 x (1.0 1.5mm²) - With end sleeves 2 x (0.5 0.75 mm²)
Finely stranded - Without end sleeves 2 x (0.5 0.75 mm <sup>2</sup> ) - Without end sleeves 2 x (0.5 1.5 mm <sup>2</sup> ) - For AWG cables for auxiliary contacts 2 x (18 14)
0.01 kg

#### CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

#### OTHER

Short Description:

Wiring diagrams:

Illumination element, Screw terminal, Green, 230 V AC, Front mounting

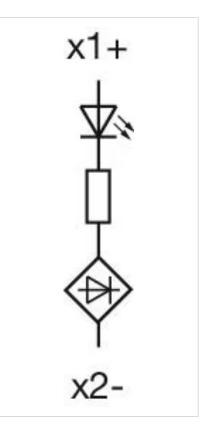

#### Dimension drawings:

