

# Illumination element

Distribution by DigiKey



45-320.2G11







# 45-320.2G11 Illumination element

M	0	u	N	ΤI	IN	G

Component mounting type: Base mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: Yellow

#### **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 6 - 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

### **MECHANICAL CHARACTERISTICS**

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm<sup>2</sup>)

- With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

Terminal details 2: Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.02 kg

#### CERTIFICATE

**REACH:** REACH compliant

RoHS: RoHS compliant

## **OTHER**


**Short Description:** 

Illumination element, Screw terminal, Yellow, 6 - 24 V AC/DC, Base mounting

Hints:

Illumination element base mounting can used only with enclosure

Wiring diagrams:

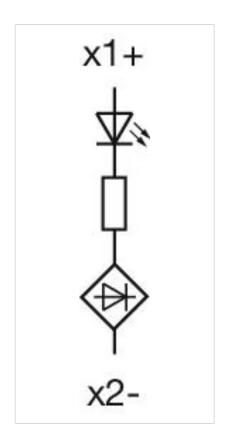

Dimension drawings:

