

Actuator

46-
2231.11H0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2231.11H0.000>

Your product:



46-2231.11H0.000 Actuator

FRONT

Front bezel material:	Plastic
Front form:	round
Front bezel colour:	Black
Front dimension:	Ø 29 mm

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens colour:	Green
Lens shape:	flush
Lens illumination:	illuminative
Lens optics:	transparent

ELECTRICAL CHARACTERISTICS

Protection class:	II
--------------------------	----

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Tightening torque:	2 ... 3 Nm (17.7 ... 26.6 Lb-in)

Weight: 0.019 kg
Mechanical lifetime: 1 Mio. cycles of operation

AMBIENT CONDITION

Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Operating temperature: - 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
IK front protection: IK03
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
IP front protection: IP65


CERTIFICATE

Conformities: CE
Approbations: CSA, EAC, UL
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Housing material: Plastic
max. number of switching elements: 8
Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, flush, illuminative, Green, Plastic, transparent, round, Black, Plastic, Momentary, IP65, IK03
Housing colour: Black

Dimension drawings:

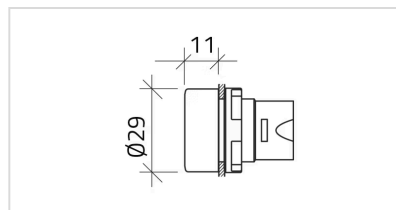

Mounting cut-outs:

