

Actuator

46-
2231.11J0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2231.11J0.000>

Your product:



46-2231.11J0.000 Actuator

FRONT

Front dimension:	Ø 29 mm
Front bezel material:	Plastic
Front bezel colour:	Black
Front form:	round

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised

OPERATING-/INDICATION PART

Lens illumination:	illuminative
Lens colour:	Blue
Lens shape:	flush
Lens material:	Plastic
Lens optics:	transparent

ELECTRICAL CHARACTERISTICS

Protection class:	II
--------------------------	----

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Mechanical lifetime:	1 Mio. cycles of operation

Weight: 0.019 kg
Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)

AMBIENT CONDITION


Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Operating temperature: - 25 °C ... + 55 °C
IP front protection: IP65
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
IK front protection: IK03

CERTIFICATE

Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508
Conformities: CE
Approbations: CSA, EAC, UL

OTHER

Housing material: Plastic
Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, flush, illuminative, Blue, Plastic, transparent, round, Black, Plastic, Momentary, IP65, IK03
max. number of switching elements: 8
Housing colour: Black
Mounting cut-outs:

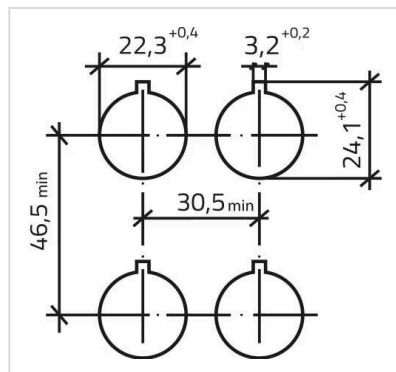

Dimension drawings:

