

Actuator

46-
2234.4FE0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2234.4FE0.000>

Your product:



46-2234.4FE0.000 Actuator

FRONT

| | |
|------------------------------|-----------|
| Front bezel material: | Aluminium |
| Front form: | round |
| Front bezel colour: | Silver |
| Front dimension: | Ø 35 mm |

MOUNTING

| | |
|--------------------------|-----------|
| Design: | flush |
| Mounting cut-out: | Ø 30.5 mm |

OPERATING-/INDICATION PART

| | |
|---------------------------|--------------|
| Lens optics: | transparent |
| Lens illumination: | illuminative |
| Lens shape: | flush |
| Lens colour: | Red |
| Lens material: | Plastic |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------------|---|
| Protection class: | I |
|--------------------------|---|

MECHANICAL CHARACTERISTIC

| | |
|---------------------------|----------------------------------|
| Weight: | 0.035 kg |
| Tightening torque: | 2 ... 3 Nm (17.7 ... 26.6 Lb-in) |

Switching action: Maintained
Mechanical lifetime: 500 000 cycles of operation

AMBIENT CONDITION

IK front protection: IK04
IP front protection: IP65
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Operating temperature: - 25 °C ... + 55 °C
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)


CERTIFICATE

Approbations: CSA, UL
Conformities: CE
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Housing material: Plastic
max. number of switching elements: 4
Housing colour: Black
Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, flush, illuminative, Red, Plastic, transparent, round, Silver, Aluminium, Maintained, IP65, IK04

Dimension drawings:

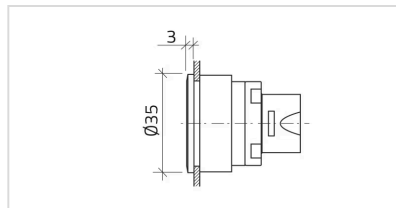

Mounting cut-outs:

