

Actuator

46-
2736.1910.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2736.1910.000>

Your product:



46-2736.1910.000 Actuator

FRONT

Front bezel material:	Plastic
Front form:	round
Front dimension:	Ø 40 mm
Front bezel colour:	Yellow

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens optics:	opaque
Lens colour:	Black
Lens shape:	mushroom-head
Lens illumination:	non illuminative

ELECTRICAL CHARACTERISTICS

Protection class:	II
--------------------------	----

MECHANICAL CHARACTERISTIC

Weight:	0.036 kg
----------------	----------

Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Release type: Twist to unlock
Mechanical lifetime: 50 000 cycles of operation

AMBIENT CONDITION


Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
IP front protection: IP65
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Operating temperature: – 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
IK front protection: IK03

CERTIFICATE

Conformities: CE
Approbations: CSA, EAC, UL
Standards: CSA G22-2, IEC EN 60947-1, IEC EN 60947-5-1, IEC EN 60947-5-5, UL508, UNI EN ISO 12100, UNI EN ISO 13850

OTHER

Housing colour: Yellow
Short Description: Actuator, Ø 22.3 mm, Ø 40 mm, mushroom-head, non illuminative, Black, Plastic, opaque, round, Yellow, Plastic, IP65, IK03, Twist to unlock
Dimension: Ø 40 mm
Housing material: Plastic
max. number of switching elements: 4
Dimension drawings:

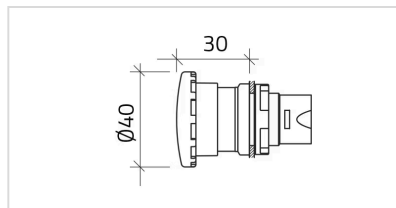

Mounting cut-outs:

