

# Actuator

46-  
2736.4920.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/46-2736.492...>

Your product:

---



## 46-2736.4920.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 40 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Silver
<b>Front bezel material:</b>	Aluminium

### MOUNTING

<b>Design:</b>	Flush
<b>Mounting cut-out:</b>	Ø 30.5 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Red
<b>Lens material:</b>	Plastic
<b>Lens illumination:</b>	Non illuminated
<b>Lens shape:</b>	Mushroom-head
<b>Lens optics:</b>	opaque

### ELECTRICAL CHARACTERISTICS

<b>Protection class:</b>	I
--------------------------	---

### MECHANICAL CHARACTERISTICS

<b>Release type:</b>	Twist to unlock
----------------------	-----------------

**Mechanical lifetime:** 50 000 cycles of operation  
**Tightening torque:** 2 ... 3 Nm (17.7 ... 26.6 Lb-in)  
**Weight:** 0.05 kg

#### **AMBIENT CONDITION**


**IP front protection:** IP65  
**IK front protection:** IK03  
**Operating temperature:** - 25 °C ... + 55 °C  
**Shock resistance:** 30g, 18ms (EN-IEC 60068-2-27)  
50g, 11ms (EN-IEC 60068-2-27)  
**Vibration resistance:** 5g f= 2...500Hz (EN-IEC 60068-2-6)  
**Climate resistance:** +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

#### **CERTIFICATE**

**Approbations:** CSA, UL  
**Conformities:** CE  
**REACH:** REACH compliant  
**RoHS:** RoHS compliant  
**Standards:** CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, IEC EN 60947-5-5, UL508, UNI EN ISO 12100, UNI EN ISO 13850

#### **OTHER**

**Short Description:** Actuator, Ø 30.5 mm, Ø 40 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Silver, Aluminium, IP65, IK03, Twist to unlock  
**Dimension:** Ø 40 mm  
**Housing colour:** Black  
**Housing material:** Plastic  
**max. number of switching elements:** 4  
**Mounting cut-outs:**

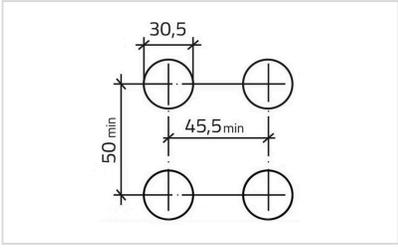

**Dimension drawings:**

