

Actuator

46-
280S.1CV0.008

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-280S.1CV0.008>

Your product:



46-280S.1CV0.008 Actuator

Loading . . .

FRONT

| | |
|-----------------------|---------|
| Front dimension: | Ø 29 mm |
| Front form: | Round |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |

MOUNTING

| | |
|-------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|-------------------|---------|
| Lever colour: | Black |
| Lever bar colour: | White |
| Lever material: | plastic |
| Lever shape: | short |

ELECTRICAL CHARACTERISTICS

| | |
|-------------------|----|
| Protection class: | II |
|-------------------|----|

MECHANICAL CHARACTERISTICS

| | |
|----------------------|------------------------------|
| Switching action: | Momentary - Rest - Momentary |
| Switching positions: | 3 positions |

| | |
|-----------------------------|----------------------------------|
| Switching angle: | 60° left / 60° right |
| Mechanical lifetime: | 1 Mil. cycles of operation |
| Tightening torque: | 2 ... 3 Nm (17.7 ... 26.6 Lb-in) |
| Weight: | 0.031 kg |


AMBIENT CONDITION

| | |
|-------------------------------|--|
| IP front protection: | IP65 |
| IK front protection: | IK06 |
| Operating temperature: | – 25 °C ... + 55 °C |
| Shock resistance: | 30g, 18ms (EN-IEC 60068-2-27) 50g, 11ms (EN-IEC 60068-2-27) |
| Vibration resistance: | 5g f= 2...500Hz (EN-IEC 60068-2-6) |
| Climate resistance: | +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30) |


CERTIFICATE

| | |
|----------------------|--|
| Approbations: | CSA, EAC, UL |
| Conformities: | CE |
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |
| Standards: | CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508 |

OTHER
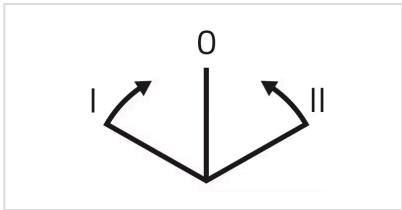
| | |
|---|---|
| Short Description: | Actuator, Ø 22.3 mm, Ø 29 mm, non illuminative, Black, short, Round, Black, Plastic, Momentary - Rest - Momentary, IP65, IK06 |
| Housing colour: | Black |
| Housing material: | Plastic |
| max. number of switching elements: | 8 |
| Switching positions: |  |

Mounting cut-outs:

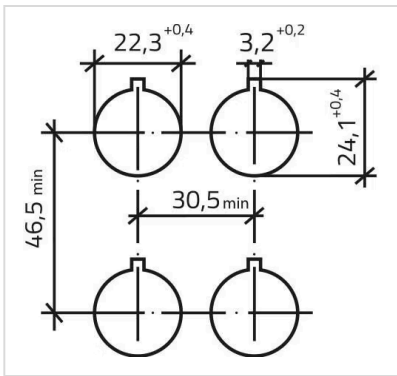

Dimension drawings:

