

# Actuator

46-  
2T00.10J0.000

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/46-2T00.10J...>

Your product:

---



## 46-2T00.10J0.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 29 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	White
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens cap colour:</b>	Blue
<b>Lens cap material:</b>	Plastic
<b>Lens cap shape:</b>	flush
<b>Lens cap optical effect:</b>	transparent
<b>Illumination colour:</b>	Blue

### ELECTRICAL CHARACTERISTICS

<b>Protection class:</b>	II
--------------------------	----

### MECHANICAL CHARACTERISTICS

<b>Tightening torque:</b>	1 ... 2.5 Nm (8.8 ... 22.1 Lb-in)
---------------------------	-----------------------------------

**Weight:** 0.009 kg

### **AMBIENT CONDITION**

**IP front protection:** IP65

**IK front protection:** IK03

**Operating temperature:** - 25 °C ... + 55 °C

**Shock resistance:** 30g, 18ms (EN-IEC 60068-2-27)  
50g, 11ms (EN-IEC 60068-2-27)

**Vibration resistance:** 5g f= 2...500Hz (EN-IEC 60068-2-6)

**Climate resistance:** +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

### **CERTIFICATE**

**Approbations:** CSA, EAC, UL

**Conformities:** CE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

**Standards:** CSA G22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

### **OTHER**

**Short Description:**

Actuator, Ø 22.3 mm, Ø 29 mm, Round, White, Plastic, IP65, IK03, Blue


**Housing colour:**

White

**Housing material:**

Plastic

**Mounting cut-outs:**

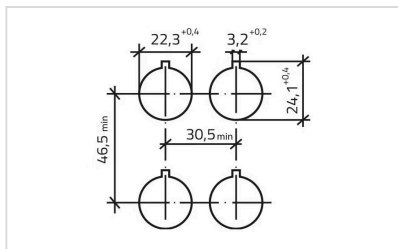

**Dimension drawings:**

