

Actuator

51-
704.006

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/51-704.006>

Your product:



51-704.006 Actuator

FRONT

Front dimension: 18 mm x 18 mm

Front form: Square

MOUNTING

Design: Raised

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current: 100 mA at 42 VAC/VDC

Electric strength: 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

MECHANICAL CHARACTERISTIC

Terminal: Universal terminal, 2 x 0.5 mm

Tightening torque: Fixing nut max. 0.5 Nm

Weight: 0.006 kg

AMBIENT CONDITION

IP front protection:

IP65, according to DIN EN 60529

Operating temperature:

– 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely

Storage temperature:

- 40 °C ... + 85 °C

Shock resistance:

15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)

CERTIFICATE

REACH:

REACH compliant

RoHS:

RoHS compliant

OTHER

Short Description:

Actuator, 18 mm x 18 mm, Square, Universal terminal, 2 x 0.5 mm, IP65,
according to DIN EN 60529


Internal size:

15,3 mm x 15,3 mm


Housing colour:

Black

Wiring diagrams:

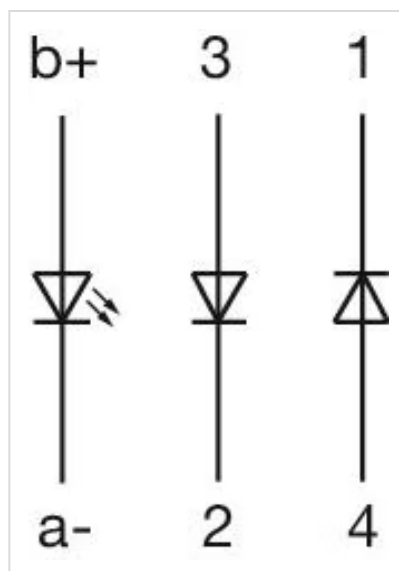

Component layouts:

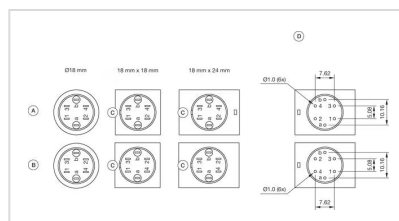

A = Universal terminal (rear side)

B = Plug-in terminal (rear side)

C = Anti twist device

D = Drilling plan

Mounting cut-outs:

