

# Actuator

61-0009.0

Distribution by DigiKey







### Your product:



## 61-0009.0 Actuator

#### **MOUNTING**

Mounting type: Panel mounting

#### **MECHANICAL CHARACTERISTICS**

Tightening torque: Max. 0.5 Nm

**Weight:** 0.005 kg

#### **AMBIENT CONDITION**

IP Protection: IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC

60529

**Operating temperature:**  $-25 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

#### **CERTIFICATE**

**REACH:** REACH compliant


**RoHS:** RoHS compliant

#### **OTHER**


Short Description: Actuator

**Housing material:** Plastic, according to UL 94 VO, self-extinguishing

Wiring diagrams:

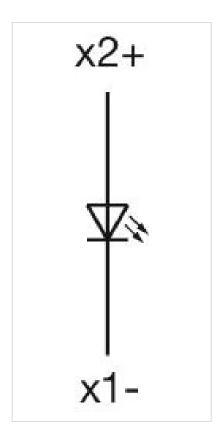


### Mounting cut-outs:



A = Solder/Plug-in terminal 2.8 mm x 0.5

B = Solder terminal C = Screw terminal


Dimension drawings:



A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal

C = Screw terminal

D = Flasher



A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal

C = Screw terminal

D = Flasher