

# Actuator

704.002.6

Distribution by DigiKey









## 704.002.6 Actuator

	_	_		_
ы	К(	91	N	

Front dimension: Ø 29 mm
Front form: Round

Front bezel colour: Grey

Front bezel material: Plastic

#### **MOUNTING**

Design: Raised

Mounting type: Panel mounting

### **OPERATING-/INDICATION PART**

Lens colour: Blue

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent


Marking plate illumination: illuminative

## **ELECTRICAL CHARACTERISTICS**


**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN


EN 60947-1

Terminal:	Screw terminal	
Weight:	0.05 kg	
AMBIENT CONDITION		
IP Protection:	IP65 front side	
Operating temperature:	– 40 °C + 55 °C	
Storage temperature:	– 40 °C + 85 °C	
CERTIFICATE		
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Actuator, Ø 29 mm, Flush, Blue, Plastic, transparent, Round, Grey, Plastic, Screw terminal	
Housing colour:	Grey	
Housing material:	Plastic	
Hints:	Filament lamp or LED	
Wiring diagrams:		

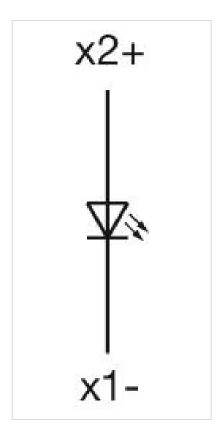


## Mounting cut-outs:





A = Screw terminal B = Push-in terminal (PIT)

## Dimension drawings:



A = Screw terminal

