

# Actuator

704.022.4

Distribution by  
DigiKey

**DigiKey**



<https://digkey.eao.com/component/704.022.4/e...>

Your product:

---



## 704.022.4 Actuator

### FRONT

**Front dimension:** Ø 29 mm

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens cap colour:** Yellow

**Lens cap material:** Plastic

**Lens cap optical effect:** translucent

**Marking cap colour:** White

**Marking cap optics:** translucent

### ELECTRICAL CHARACTERISTICS

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Weight:** 0.025 kg

### AMBIENT CONDITION


<b>IP Protection:</b>	IP65 front side
<b>Operating temperature:</b>	– 40 °C ... + 55 °C
<b>Storage temperature:</b>	– 40 °C ... + 85 °C

## CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 29 mm, Round, Screw terminal
<b>Housing colour:</b>	Grey
<b>Housing material:</b>	Plastic
<b>Product attributes:</b>	Filament lamp 130 V, max. 2.6 W with integrated series resistor 230/130 V
<b>Wiring diagrams:</b>	

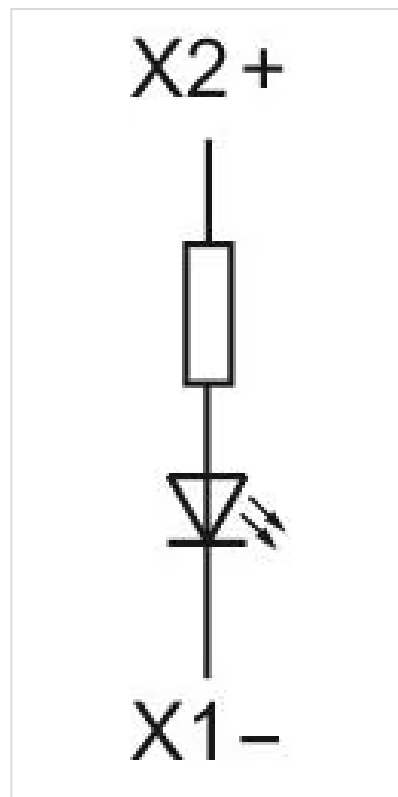

**Mounting cut-outs:**

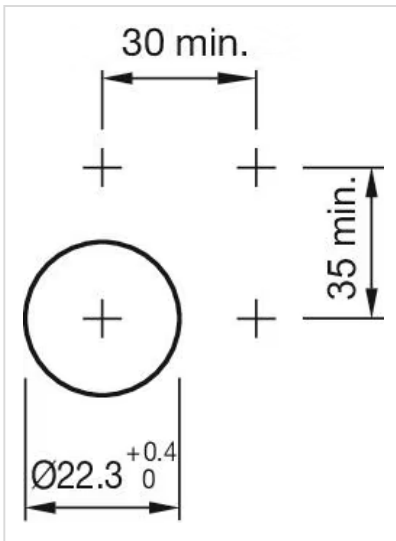

Dimension drawings:

