


Actuator

704.092.0

Distribution by DigiKey



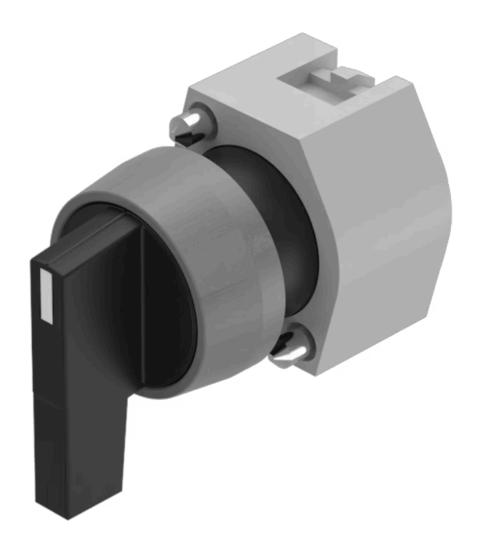



Your product:



704.092.0 Actuator

FRONT	
Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Grey
Front bezel material:	Plastic
MOUNTING	
Design:	Raised
Mounting type:	Panel mounting
OPERATING-/INDICATION PART	
Lever colour:	Black
Lever bar colour:	White
Lever material:	plastic
Lever shape:	long
ELECTRICAL CHARACTERISTICS	
Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
	LIN GOOTI I
MEQUANIQAL QUADA OTERIOTICS	
MECHANICAL CHARACTERISTICS	

Switching action: Maintained - Rest - Maintained

Switching positions: 3 positions

Switching angle: 42° left / 42° right

Mechanical lifetime: ≤2.5 Mil. cycles of operation

Weight: 0.033 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 29 mm, non illuminative, Black, long, Round, Grey, Plastic, Maintained

- Rest - Maintained


Hints: Max. 3 switching elements can be clipped on

max. number of switching

elements:


3

Switching positions:

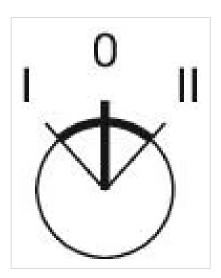

Wiring diagrams:


Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal