


Your Expert Partner for Human Machine Interfaces

Actuator

704.100.0

Distribution by DigiKey DigiKey

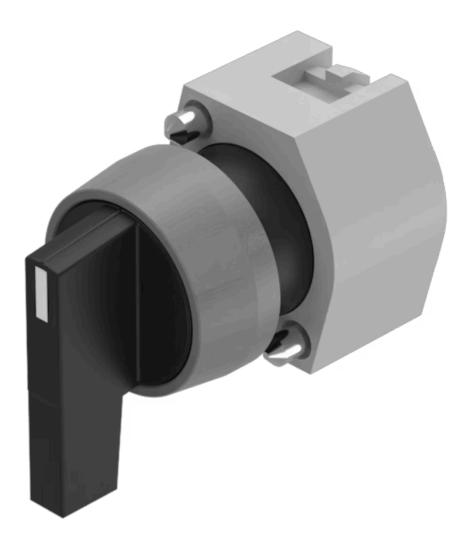



https://digikey.eao.com/p/704.100.0

Your product:



704.100.0 Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Grey
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lever colour:	Black
Lever bar colour:	White
Lever material:	plastic
Lever shape:	long

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN
	EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action:	Rest - Maintained
Switching positions:	2 positions
Switching angle:	90° right / -45° +45°

Mechanical lifetime:	≤2.5 Mil. cycles of operation
Weight:	0.034 kg

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	- 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

max. number of switching elements:

Switching positions:

Short Description:	Actuator, Ø 29 mm, non illuminative, Black, long, Round, Grey, Plastic, Rest - Maintained
Hints:	Max. 3 switching elements can be clipped on


З



Wiring diagrams:




Mounting cut-outs:



- A = Screw terminal

- B = Push-in terminal (PIT) C = Plug-in terminal 6.3 mm x 0.8 mm D = Double plug-in terminal 6.3 mm x 0.8
- mm





A = Screw terminal