


Actuator

704.101.0

Distribution by DigiKey



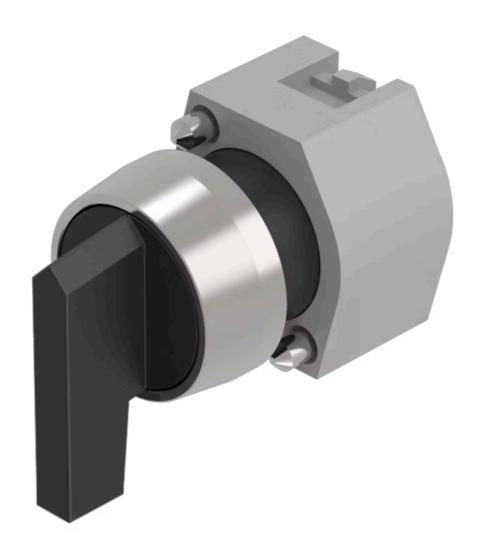



Your product:



704.101.0 Actuator


| FRONT | |
|----------------------------|---|
| Front dimension: | Ø 29 mm |
| Front form: | Round |
| Front bezel colour: | Nature |
| Front bezel material: | Aluminium |
| | |
| MOUNTING | |
| Design: | Raised |
| Mounting type: | Panel mounting |
| | |
| OPERATING-/INDICATION PART | |
| Lever colour: | Black |
| Lever bar colour: | Black |
| Lever material: | plastic |
| Lever shape: | long |
| | |
| ELECTRICAL CHARACTERISTICS | |
| Standards: | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |
| | |
| MECHANICAL CHARACTERISTICS | |
| | |

Switching action: Rest - Maintained

Switching positions: 2 positions


Switching angle: $90^{\circ} \text{ right } / -45^{\circ} \dots +45^{\circ}$

| Mechanical lifetime: | ≤2.5 Mil. cycles of operation |
|------------------------------------|---|
| Weight: | 0.037 kg |
| | |
| AMBIENT CONDITION | |
| IP Protection: | IP65 front side |
| Operating temperature: | – 40 °C + 55 °C |
| Storage temperature: | – 40 °C + 85 °C |
| | |
| CERTIFICATE | |
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |
| | |
| OTHER | |
| Short Description: | Actuator, \varnothing 29 mm, non illuminative, Black, long, Round, Nature, Aluminium, anodised, Rest - Maintained |
| Hints: | Max. 3 switching elements can be clipped on |
| max. number of switching elements: | 3 |
| Switching positions: | |
| | 0 |
| | |
| | \mathbf{X} |



Wiring diagrams:


Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal