


Actuator

704.124.018

Distribution by
DigiKey

DigiKey

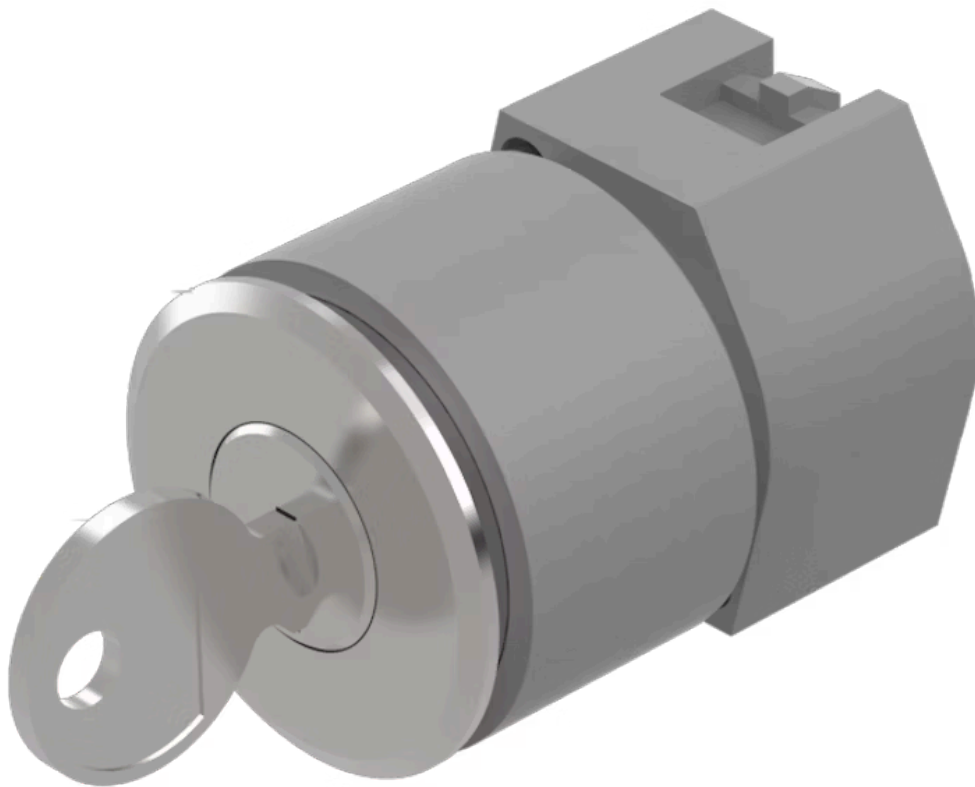

<https://digikey.eao.com/p/704.124.018>

Your product:



704.124.018 Actuator

FRONT

Front bezel colour:	Nature
Front bezel material:	Aluminium
Front dimension:	Ø 35 mm

MOUNTING

Mounting cut-out:	Ø 30.5 mm
Design:	flush

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤50 000 cycles of operation
Weight:	0.099 kg
Switching angle:	42° left / 42° right
Switching action:	Maintained (a) - Rest (a) - Momentary
Switching positions:	3 positions

AMBIENT CONDITION

Operating temperature: - 40 °C ... + 55 °C

IP Protection: IP65 front side

Storage temperature: - 40 °C ... + 85 °C


OTHER

max. number of switching elements: 3

Short Description: Actuator, Ø 35 mm, Nature, Aluminium, Maintained (a) - Rest (a) - Momentary

Hints: The standard lock Ronis 251, Further lock numbers on request, Max. 3 switching elements can be clipped on

Mounting cut-outs:

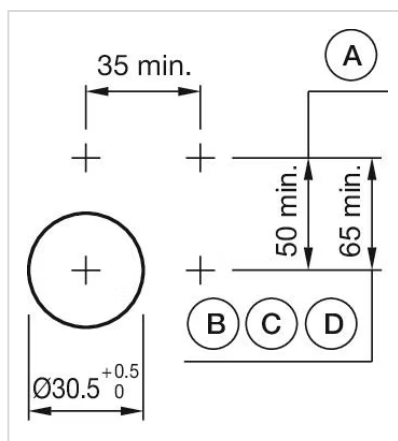


A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.

Wiring diagrams:



Switching positions:

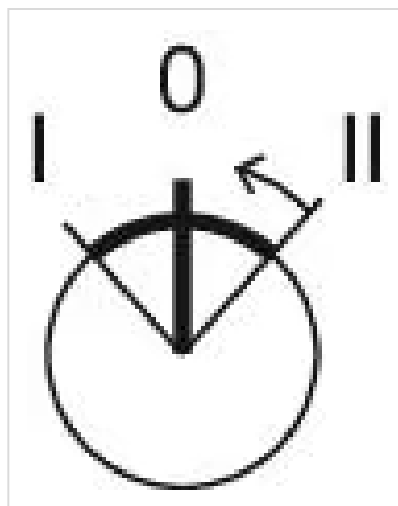

Dimension drawings:

A = Screw terminal

