

Your Expert Partner for Human Machine Interfaces

## Actuator

Distribution by DigiKey



<image>



https://digikey.eao.com/p/704.200.6

704.200.6

### Your product:



# 704.200.6 Actuator

#### FRONT

Front dimension:	30 mm x 30 mm
Front form:	Square
Front bezel colour:	Grey
Front bezel material:	Plastic

#### MOUNTING

Design:	Raised
Mounting type:	Panel mounting

#### **OPERATING-/INDICATION PART**

Lens cap colour:	Blue
Lens cap material:	Plastic
Lens cap optical effect:	transparent
Marking cap colour:	White
Marking cap optics:	translucent

#### **ELECTRICAL CHARACTERISTICS**

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
	EN 60947-1

#### **MECHANICAL CHARACTERISTICS**

Terminal:	Screw terminal
Weight:	0.05 kg

#### **AMBIENT CONDITION**


IP Protection:	IP65 front side
Operating temperature:	- 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C


#### CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

#### OTHER


Short Description:	Actuator, 30 mm x 30 mm, Square, Grey, Plastic, Screw terminal
Housing colour:	Grey
Housing material:	Plastic
Wiring diagrams:	

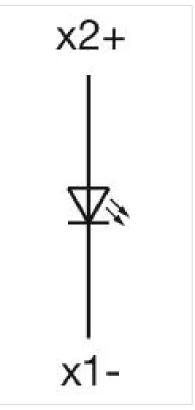






**Dimension drawings:** 





A = Screw terminal