


Actuator

704.202.208

Distribution by DigiKey



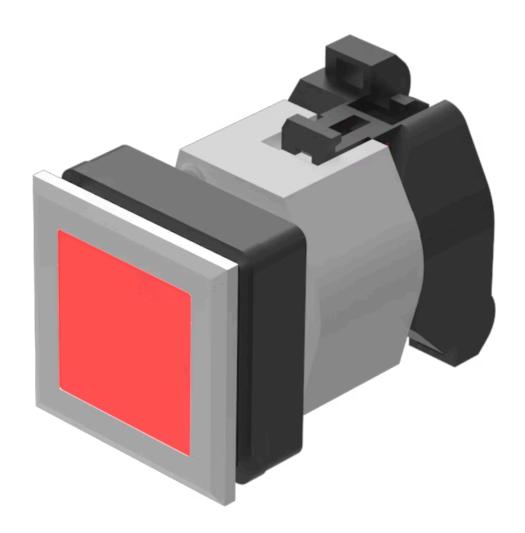





704.202.208 Actuator

		\sim		_
-	к		N	
		$\overline{}$	u.	

Front dimension: 35 mm x 35 mm

Front form: Square

Front bezel colour: Silver

Front bezel material: Plastic

MOUNTING

Design: Flush

Mounting cut-out: 30 mm x 30 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent

Marking plate illumination: illuminative


ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN


EN 60947-1

MECHANICAL CHARACTERISTICS

Terminal:	Screw terminal
Weight:	0.046 kg
AMBIENT CONDITION	
IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Actuator, 30 mm x 30 mm, 35 mm x 35 mm, Flush, Red, Plastic, transparent, Square, Silver, Plastic, Screw terminal
Housing colour:	Black
Housing material:	Plastic
Wiring diagrams:	

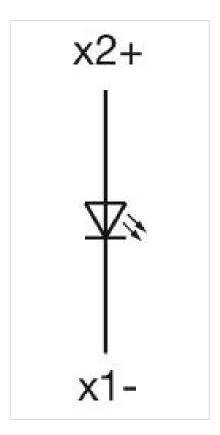



Mounting cut-outs:



A = Screw terminal

Dimension drawings:





A = Screw terminal