


Actuator

704.210.408

Distribution by DigiKey



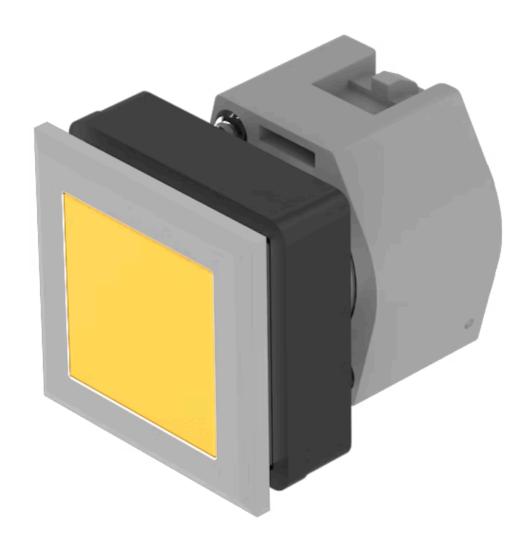





704.210.408 Actuator

_	_	-		_
-	u	m	N	п
	ıı	v	13	

Front dimension: 35 mm x 35 mm

Front form: Square

Front bezel colour: Silver

Front bezel material: Plastic

MOUNTING

Design: Flush

Mounting cut-out: 30 mm x 30 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Yellow

Lens material: Plastic

Lens illumination: Non illuminated

Lens shape: Flush

Lens optics: transparent

ELECTRICAL CHARACTERISTICS


Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action: Momentary


Mechanical lifetime:	≤3 Mil. cycles of operation
Operating force:	6.2 N
Operating Travel:	ca. 5.8 mm ± 0.2 mm
Weight:	0.032 kg
AMBIENT CONDITION	
IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Actuator, 30 mm x 30 mm, 35 mm x 35 mm, Flush, Non illuminated, Yellow, Plastic, transparent, Square, Silver, Plastic, Momentary
Housing colour:	Black
Housing material:	Plastic
Hints:	Max. 3 switching elements can be clipped on
max. number of switching elements:	3
Wiring diagrams: Mounting cut-outs:	E
Mounting cut-outs.	



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal