


Actuator

704.743.8

Distribution by DigiKey



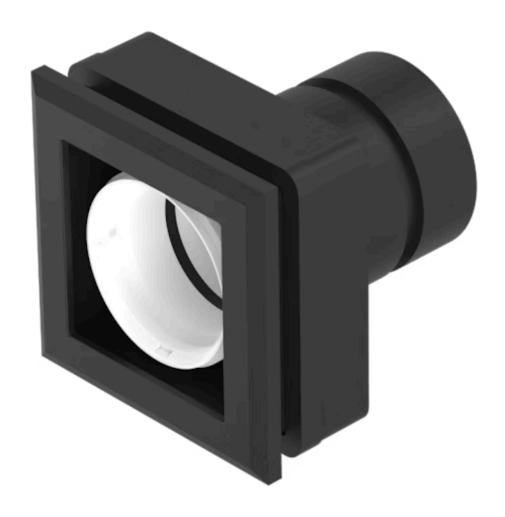





704.743.8 Actuator

E	D	0	N	п
г	п	v	13	

Front dimension: 35 mm x 35 mm

Front form: Square

Front bezel colour: Silver

Front bezel material: Plastic

MOUNTING

Mounting cut-out: 30 mm x 30 mm

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Weight: 0.02 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \dots + 55 \, ^{\circ}\text{C}$

Storage temperature: - 40 °C ... + 85 °C

CERTIFICATE

REACH: REACH compliant


OTHER

Short Description: Actuator, 30 mm x 30 mm, 35 mm x 35 mm, Square, Silver, Plastic


Housing colour: Black

Plastic Housing material:

Wiring diagrams:

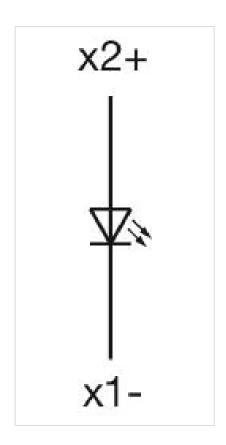

Mounting cut-outs:




A = Screw terminal

B = Push-in terminal (PIT)

C = Plug-in terminal 6.3 mm x 0.8 mm

D = Double plug-in terminal 6.3 mm x 0.8


mm




A = Screw terminal

B = Push-in terminal (PIT)

Dimension drawings:



A = Screw terminal



A = Screw terminal