


Switching element

Distribution by
DigiKey

DigiKey

71-671.026

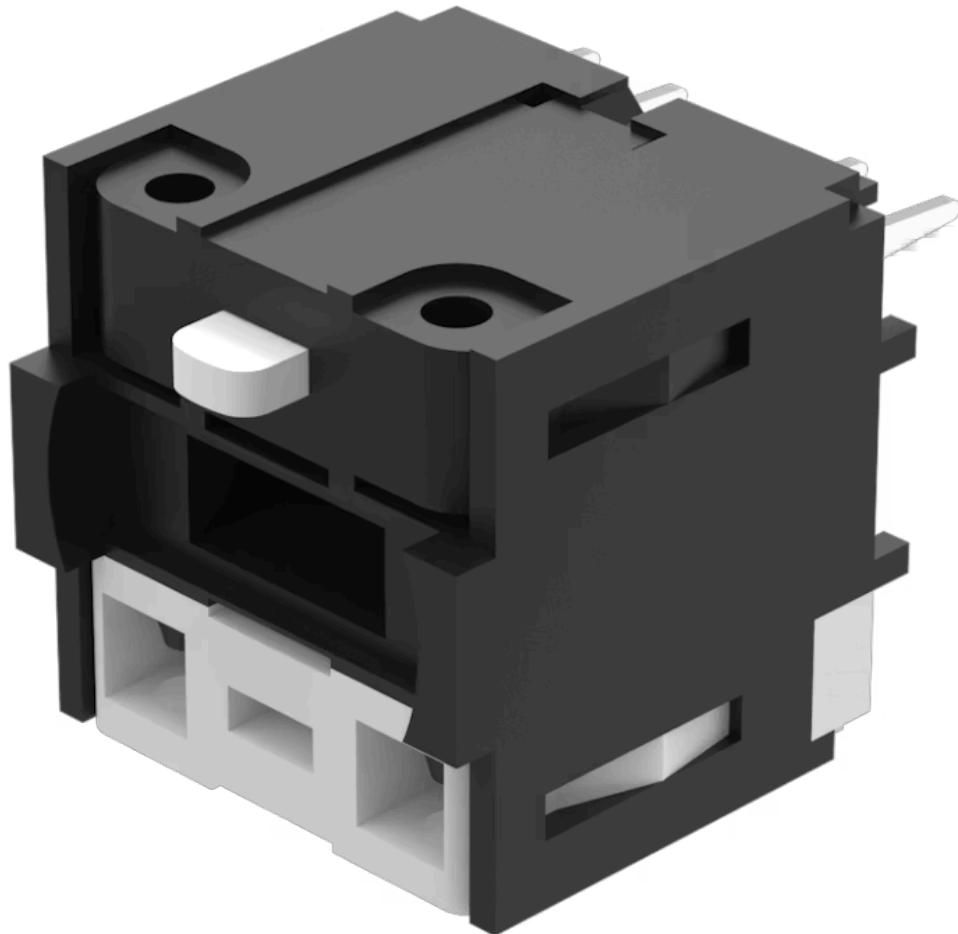

[https://digikey.eao.com/component/71-671.026/...](https://digikey.eao.com/component/71-671.026/)

Your product:



71-671.026

Switching element

ELECTRICAL CHARACTERISTICS

Contacts: 1 NC / 1 NO

Switching rating: 250 V @ 3 A

MECHANICAL CHARACTERISTICS

Terminal: PCB terminal

Contact material: Gold

Switching system: Snap-action switching element

Switching positions: 2 positions

Weight: 0.006 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 1 NC / 1 NO, PCB terminal

Housing material: Plastic, according to UL 94 V0


Product attributes: Including locking pin

Hints: Including locking pin

Wiring diagrams:

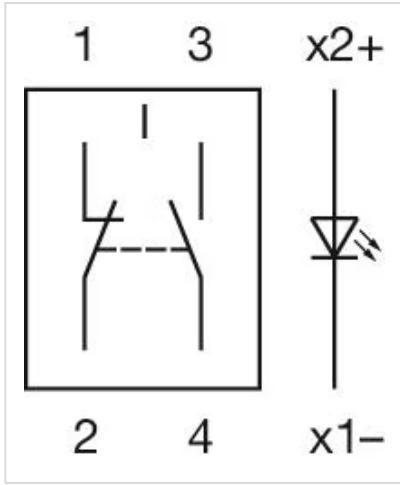

Component layouts:

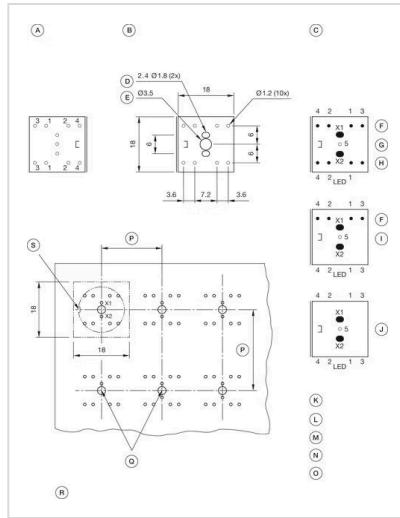

A = Terminals (rear side)
 B = Drilling plan (component side)
 C = non-metallic
 D = Cu-Pad
 E = Occupancy plan (component side)
 F = 1. Switch
 G = Switching element 2 Normally close + 2 Normally open, Part No. 71-672.026
 H = 2. Switches
 I = Switching element 1 Normally close + 1 Normally open, Part No. 71-671.026
 J = Illumination element, Part No. 71-670.026
 K = X1 Lamp cathode (-)
 L = X2 Lamp anode (+)
 M = 1-2 Contact normally closed
 N = 3-4 Contact normally open
 O = 5 Hole for interlocking pin
 P = Front dimension min.
 Q = Position interlocking pin
 R = Note:
 Pitch of the print circuit board hole Ø3.5

must agree with the mounting holes on the front plate
 S = Slot in actuator