

# Indicator 22 mm

DigiKey 82-6151.0124

Distribution by DigiKey









# 82-6151.0124 Indicator 22 mm

_	_	_		-
-	к	u	N	

Front dimension: Ø 25 mm

Front form: Round

Front bezel material: Stainless steel

Front bezel shape: Flush

#### **MOUNTING**

Mounting cut-out: Ø 22 mm

Mounting type: Panel mounting

#### **OPERATING-/INDICATION PART**

Lens colour: Silver

Lens material: Stainless steel

Lens illumination: Illuminated

**Lens shape:** Flush

Lens optics: opaque

Illumination colour: Blue

Shape of illumination: Ring

### **ELECTRICAL CHARACTERISTICS**

Switching voltage and switching current:

according to UL 508 (Silver contacts)

cosφ 0,75 ... 0,8

 Voltage
 Current

 120 VAC
 5 A

 240 VAC
 3 A

 24 VAC
 1 A

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage Current 24 VAC 1 A

35 VAC 1 A (M12 version)

110 VAC 1 A 220 VAC 0.5 A Switch rating DC service categorie DC-13 (Silver contacts)

Voltage

24 VDC 0.7 A

35 VDC 0.5 A (M12 version)

110 VDC 0.2 A 220 VDC 0.1 A

Operating voltage: 24 V AC/DC

**Operation current:** 7 mA

Rated Operational Voltage Ue: 250 VAC

Rated insulation voltage Ui: 250 V

**Electrical lifetime:** 50 000 cycles of operation

Electric strength: 1500 VAC, 50 Hz 1 minute between life terminals and ground

**Pollution degree:** 2, according to EN IEC 60947-1

Thermal current Ith: 5 A

#### **MECHANICAL CHARACTERISTICS**

**Terminal:** Soldering terminal, 2.8 x 0.5 mm

**Tightening torque:** 0.5 ... 0.6 Nm

**Weight:** 0.018 kg

#### **AMBIENT CONDITION**

IP front protection: IP65, IP67

**Operating temperature:**  $-30~^{\circ}\text{C} \dots + 70~^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 80 \, ^{\circ}\text{C}$ 

**Shock resistance:** Max.  $500 \text{ m} / \text{s}^2$  as per IEC 60068-2-27

Vibration resistance: 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Climate resistance: Damp heat, 21 days according to IEC 60512-11

#### **CERTIFICATE**

**Approbations:** CB, CCC, C UL, UL

**REACH:** REACH compliant

### **OTHER**


**Short Description:** 

Indicator 22 mm, 24 V AC/DC, Soldering terminal, 2.8 x 0.5 mm, Round, Stainless steel, Blue, Silver


Kind of illlumination:

Single-LED


Wiring diagrams:

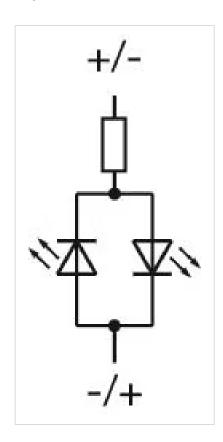


Component layouts:



Mounting cut-outs:



## Dimension drawings:



A = Solder terminal B = Screw terminal