

Illuminated pushbutton

K14-131.121092

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/K14-131.121092>

Your product:



K14-131.121092

Illuminated pushbutton

MOUNTING

Mounting cut-out: Ø 22.3 mm

OPERATING-/INDICATION PART

Lens shape: flush

Lens optics: transparent

Lens illumination: illuminative

Illumination colour: White

Lens material: Plastic

Lens colour: Colourless

ELECTRICAL CHARACTERISTICS

Contacts: 1 NC / 1 NO

Operating voltage: 28 V AC/DC

Protection class: II

Operation current: 2,5/5 mA ±15 %

Electrical lifetime: 50 000 cycles of operation

Standards: According to EN/IEC 61058-1

Thermal current I_{th}: 3 A

Rated Operational Voltage U_e: 250 VAC/DC according to EN IEC 61058-1

Electric strength: 3000 VAC, 50 Hz, 1 min. between all terminals and earth, according to EN/IEC 61058-1

Switching voltage and switching current:

250 VAC, 5 A (ohmic)
250 VAC, 3 A (Soldering terminal)
250 VAC, 2 A (inductive, $\cos(\phi) = 0.7$)
220 VDC, 0.1 A (inductive, L:R = 30 ms)
110 VDC, 0.2 A (inductive, L:R = 30 ms)
60 VDC, 0.7 A (inductive, L:R = 30 ms)
24 VDC, 2 A (inductive, L:R = 30 ms)

MECHANICAL CHARACTERISTIC

Contact material:	Gold-plated silver
Operating force:	3 N ... 6 N
Operating Travel:	3 mm
Tightening torque:	Fixing nut max. 0.25 Nm
Mechanical lifetime:	2 Mio. cycles of operation
Switching action:	Momentary
Weight:	0.021 kg
Terminal:	Soldering terminal
Switching system:	Snap-action switching element
Wire cross section:	Max. wire diameter 2 wires à 1.2 mm Max. wire cross-section of stranded cable 1 x 1 mm ²

AMBIENT CONDITION

Storage temperature:	- 40 °C ... + 85 °C
Operating temperature:	- 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely
IP front protection:	IP67, according to DIN EN 60529
Vibration resistance:	Max. 100 m / s ² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)
Climate resistance:	Standard condition, as per DIN EN 60068-2-78 Standard cyclic, as per DIN IEC 60068-2-30
Shock resistance:	Max. 150 m / s ² , pulse width 11 ms, 3-axis, (semi-sinusoidal as per EN IEC 60068-2-27)

CERTIFICATE

Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)
Approbations:	CB (IEC 61058-1), CQC, CSA, DNV, EAC, ENEC (EN 61058-1), UL, VDE

OTHER

Short Description:


Illuminated pushbutton, Momentary, 250 V AC @ 5 A, 28 V AC/DC, 1 NC / 1 NO, Soldering terminal, White, Colourless

Housing material: Plastic


max. number of switching elements: 1

Housing colour: Black

Mounting cut-outs:

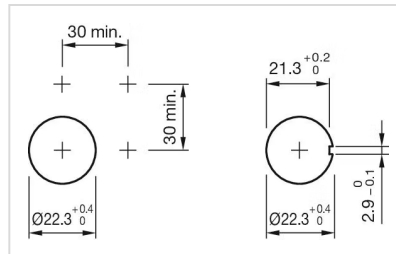

Wiring diagrams:

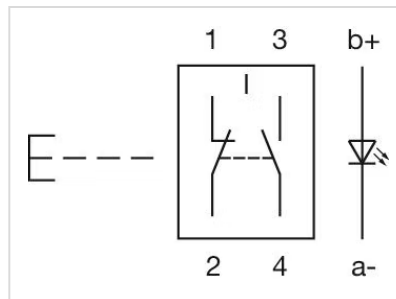

Dimension drawings:

